



COMMERCIAL PRODUCT CATALOG 2020

UPDATED 4/2021

 **PROGRESS**
LIGHTING™



See Yourself Here.

Lighting helps tell a story as well as being an integral part of the modern commercial environment. From providing functional light that improves well-being and efficiency, to bringing beautiful style to interior and exterior applications, let Progress Lighting be your guide in illuminating these spaces into special places.

Table of Contents

Site Lighting	16
Area Lighting	18
Low Level/Pathway	26



Building Exterior	28
Flood Lighting	30
Wall/Surface	31
Outdoor	32



Egress	46
Exit	48
Emergency	50

Building Interior	52
Linear	54
Undercabinet	56
Recessed Downlighting	60
Surface Mount Downlighting	65
Steps, Corridors & Wall Lights	69
DFS Series	70
Close-to-Ceiling	78
Sconces	89
Bath	92
Pendants	107



Ceiling Fans	120
--------------	-----



Index	138
-------	-----





A Complete Solution for Commercial Projects

Progress Lighting offers a wide selection of light commercial and commercial luminaires that work together to provide unique solutions for various applications, including multi-family, hospitality, assisted living, workplace environments and many others.

Our collection of proven lighting designs is diverse and versatile, with style and function for any type of space. We offer more than 100 new integrated LED options that present numerous benefits over traditional sources, such as energy savings, increased light and color output, easy installation and low maintenance.

We understand that multi-use projects require both interior and exterior lighting solutions that meet the specific needs of each area. We have interior lighting in the latest style trends, such as decorative fixtures for the bath and vanity, kitchen and living areas, as well as exterior fixtures that consider security, pedestrian safety, maintenance and site lighting needs.

For more than 100 years, Progress Lighting has been a leading provider of reliable commercial fixtures that represent aesthetics, performance, innovation and value. Our complete lighting solutions meet or exceed individual project needs, every time.

Area Lighting

PCAPAB SERIES

Bronze p.18



PCPA SERIES

Black, Bronze, Grey p.18



PCPTS SERIES

Black, Bronze p.19



PCPTD SERIES

Black, Bronze p.19



PCAD SERIES

Black, Bronze p.20



PCAD SERIES

Black, Bronze, Green p.21



POLES AND DECORATIVE ARMS

Multiple Options p.22



Low Level Pathway

BOLLARDS

Black, Bronze

p.20



STEP LIGHTS LED

Multiple Finishes

p.26



STEP LIGHTS LED

Multiple Finishes

p.26



STEP LIGHTS LED

Multiple Finishes

p.26



STEP LIGHTS LED

Multiple Finishes

p.26



INTEGRATED LED LOW VOLTAGE

Black

p.27



INTEGRATED LED LOW VOLTAGE

Black

p.27



INTEGRATED LED LOW VOLTAGE

Black

p.27



INTEGRATED LED LOW VOLTAGE

Black, Brushed Nickel

p.27



INTEGRATED LED LOW VOLTAGE

Antique Bronze, Black

p.27



INTEGRATED LED LOW VOLTAGE

Black

p.27



INTEGRATED LED LOW VOLTAGE

Black

p.27



INTEGRATED LED LOW VOLTAGE

Black

p.27



ACCESSORIES

Black

p.27



Wall/ Surface & Outdoor

PCOWC SERIES

Bronze p.31



COMMERCIAL WALL PACK

Bronze p.31



COMMERCIAL WALL PACK

Bronze p.31



ALUMINUM CYLINDERS LED

Multiple Finishes p.32



ALUMINUM SQUARES LED

Multiple Finishes p.34



CYLINDER ACCESSORIES

Multiple Finishes p.34



BROOKSIDE LED

Multiple Finishes p.35



DISTRICT LED

Multiple Finishes p.35



CEDAR SPRINGS

Multiple Finishes p.36



CEDAR SPRINGS WALL

Multiple Finishes p.37



BELL LED

Multiple Finishes p.38



ENDORSE LED

Antique Bronze, Black p.38



WESTPORT LED

Antique Bronze, Black p.39



BULKHEADS LED

Black, White p.40



STRATA LED

Multiple Finishes p.41



CORNICE LED

Multiple Finishes p.41



Wall/ Surface & Outdoor

Z-1030 LED

Black, Metallic Grey

p.42



Z-1010 LED

Multiple Finishes

p.42



Z-1020 LED

Architectural Bronze, Black

p.43



VALERA LED

Multiple Finishes

p.43



Z-1070 LED

Multiple Finishes

p.44



Z-1080 LED

Black, Metallic Grey

p.44



Z-1090 LED

Black, Metallic Grey

p.45



Z-1060 LED

Black

p.45



Flood Lighting

COMMERCIAL FLOODLIGHT

Bronze

p.30



COMMERCIAL FLOODLIGHT

Bronze

p.30



COMMERCIAL CANOPY

Bronze

p.30



Egress

EXIT SIGN

White- Green, Red p.48



COMBO EXIT/ EMERGENCY

White- Green, Red p.48



ALUMINUM EXIT SIGN

Brushed Aluminum p.48



WET LOCATION EXIT SIGN

White - Green, Red p.49



EDGE-LIT EMERGENCY EXIT

Brushed Aluminum p.49



EMERGENCY LIGHT

White p.50



INDOOR/OUTDOOR REMOTE HEADS

White p.50



NORMALLY ON/OFF OUTDOOR EMERGENCY

Bronze p.51



WET LOCATION EMERGENCY LIGHT

Metallic Grey p.51



Linear

RECESSED PERFORMANCE

White p.54



LOW PROFILE WRAPAROUND

White p.54



STAIRWELL LUMINAIRE

White p.54



LINEAR VAPOR TIGHT

White p.55



LOW PROFILE LENS STRIP

White p.55




LINEAR CLOUD LED

White p.55



WRAP & STRIP LED

White p.56



SURFACE MOUNT LINEAR LED

Multiple Finishes p.56



Undercabinet

UNDERCABINET LED

Antique Bronze, White p.57



TAPE LED

Multiple Lengths p.58



TAPE LED CONNECTORS

Black p.59



TAPE LED ACCESSORIES

Multiple Options p.59



Recessed Downlighting

EDGELIT RECESSED LED

Multiple Finishes p.60



4" LED HOUSING

Multiple Options p.61



4" LED ROUND TRIM

Multiple Finishes p.61



4" LED EYEBALL

Multiple Finishes p.61



5" RECESSED LED HOUSING

Multiple Options p.62



5" LED ROUND TRIM

Multiple Finishes p.62



5" LED EYEBALL TRIM

Multiple Finishes p.62



5" RECESSED HOUSING

Remodel Shallow p.63



SHOWER TRIM

White p.63



STEP BAFFLE

White p.63



EYEBALL

White p.63



6" RECESSED LED HOUSING

New Construction p.64



6" LED TRIM 1000 LUMENS

White p.64



6" LED TRIMS

Multiple Finishes p.64



Surface Mount Downlighting

EVERLUME™ ROUND SURFACE MOUNT LED

White p.65



EVERLUME™ ROUND TRIM ACCESSORIES

Multiple Finishes p.66



ROUND SURFACE MOUNT LED

White p.67



EMBLEM SURFACE MOUNT LED

Bronze, White p.67



INTRINSIC SURFACE MOUNT LED

White p.67



DECORATIVE SURFACE MOUNT LED

Multiple Finishes p.67



RETROFIT RECESSED ACCESSORIES

Multiple Options p.67



DFS Series

DFS SERIES SQUARE DRUM

Multiple Finishes p.72



DFS SERIES ROUND DRUM

Multiple Finishes p.73



DFS SERIES DOUBLE LAYER

Multiple Finishes p.74



DFS SERIES INNER STEP

Multiple Finishes p.74



DFS SERIES DOME-IN-SHADE

Multiple Finishes p.75



DFS SERIES TAPERED SHADE

Multiple Finishes p.75



DFS SERIES HALF CYLINDER

Multiple Finishes p.76



DFS SERIES HOURGLASS

Multiple Finishes p.76



DFS SERIES CONCAVE

Multiple Finishes p.76



DFS SERIES VERICAL SWEEP

Multiple Finishes p.76



Close-to-Ceiling

DFS SERIES

DOUBLE SQUARE

Multiple Finishes p.77



WEAVER LED

Multiple Finishes p.78



BEYOND LED

Brushed Nickel p.78



SURFACE MOUNT LED

Multiple Finishes p.79



MINGLE LED

Multiple Finishes p.79



HELM LED

Multiple Finishes p.80



FRESNEL LED

Multiple Finishes p.80



APOGEE LED

Multiple Finishes p.81



BEZEL LED

Multiple Finishes p.81



INSPIRE LED

Multiple Finishes p.82



DOME LED

Multiple Finishes p.82



PORTAL LED

Multiple Finishes p.83



GATHER LED

Multiple Finishes p.83



FLUSH MOUNTS LED

Multiple Finishes p.84



SQUARE ALABASTER GLASS LED

Multiple Finishes p.85



CLOUD + DRUM LED

Black, White p.86



MAIER DC LED

Multiple Finishes p.87



LINEN LED

Brushed Nickel p.88



6" FITTER LED

Brushed Nickel, White p.88



MILFORD LED

Black p.89



Sconces/Bath

FRAME LED
Multiple Finishes p. 89, 96



TRUSS LED
Multiple Finishes p.92, 96



APOGEE LED
Multiple Finishes p.89



ECLIPSE LED
Multiple Finishes p.90



INSPIRE LED
Multiple Finishes p.90



ANSON LED
Architectural Bronze p.90



LED SCONCES
Multiple Options p.91



LED SCONCES
Multiple Finishes p.91



PONDER LED
Multiple Finishes p.92



CAPELLI LED
Polished Chrome p.98



MITER LED
Brushed Nickel p.93



CONCOURSE LED
Brushed Nickel p.93



COLONNADE LED
Multiple Finishes p.94



BEAM LED
Multiple Finishes p.95



PLANCK LED
Brushed Nickel p.95



PARALLEL LED
Multiple Finishes p.97



BLANCO LED
Multiple Finishes p.98



ACE LED
Multiple Finishes p.99



PHASE 1.1 LED
Brushed Nickel p.100



PHASE 1.2 LED
Brushed Nickel p.100



PHASE 2.1 LED
Brushed Nickel p.101




PHASE 2.1 LED
Brushed Nickel p.101



BATH LED
Brushed Nickel p.102



CLOUD LED
Opal White p.103



CAPTARENT
Mirrored p.104



Pendants

MARKOR PENDANT
Multiple Options p.107



ROUND CANOPY
Multiple Finishes p.108



LINEAR CANOPY
Multiple Finishes p.109



PLANCK LED
Multiple Finishes p.111



CONCOURSE LED
Brushed Nickel p.112



BROOKSIDE LED
Brushed Nickel p.112



FRESNEL LENS LED
Multiple Finishes p.113



DOME LED
Multiple Finishes p.114



GLOBE LED
Multiple Finishes p.115



PRISMATIC GLASS LED
Brushed Nickel p.116



NEAT LED
Multiple Finishes p.116



AVANT LED
Multiple Finishes p.117



SIMPLE LED
Multiple Finishes p.117



PURE LED
Brushed Nickel p.118



WAREHOUSE PENDANT LED
Multiple Finishes p.118



Ceiling Fans

VAST
Multiple Finishes p.122



SANFORD
Multiple Finishes p.124



GAZE
Multiple Finishes p.125



ORIOLE
Multiple Finishes p.126



SOAR
Multiple Finishes p.127



GUST
Multiple Finishes p.128



KUDOS
Multiple Finishes p.129



52" SIGNATURE FAN
Multiple Finishes p.130



TREVINA II 52"
Multiple Finishes p.132



SIGNATURE PLUS II
Multiple Finishes p.133



52" BUILDER FAN
Multiple Finishes p.134



42" BUILDER FAN
Multiple Finishes p.135



52" PATIO FAN
Multiple Finishes p.136







RISE UP!

IMG ACADEMY

RISE UP!



Site Lighting

UNIFORM ILLUMINATION FOR OUTDOOR COMMERCIAL SPACES

Our selection of site lighting and accessories provides consistent illumination for parking lots, walkways, building grounds, common and other outdoor areas for increased safety, including LED area lights for additional control and energy savings.

PCPAB Series

Economy Series Parking/Site Luminaire

The PCPAB series is designed to provide efficient illumination for parking and area lighting applications, utilizing high power LEDs. The PCPAB is offered in 10,000, 16,000 and 30,000 lumen versions. All models standard as 4000K CCT.



Series	Wattage	Lumens	Distribution	Finish	CCT/CRI
PCPAB	80LED - 80W	10000	2 - Type 2	BZ - Bronze	4000K/80CRI
	140LED - 140W	16000	3 - Type 3		
	240LED - 240W	30000	4 - Type 4 5 - Type 5		




Ships within 5 days

PCPA Series

Performance Series Parking/Site Luminaire

The PCPAS and PCPAL series are designed to provide high performance illumination for parking and area lighting applications, utilizing high power LEDs. The PCPAS is offered in 5,000 to 9,000 lumen versions. The PCPAL is offered in 15,000 to 27,000 lumen versions. All models standard as 4000K CCT.

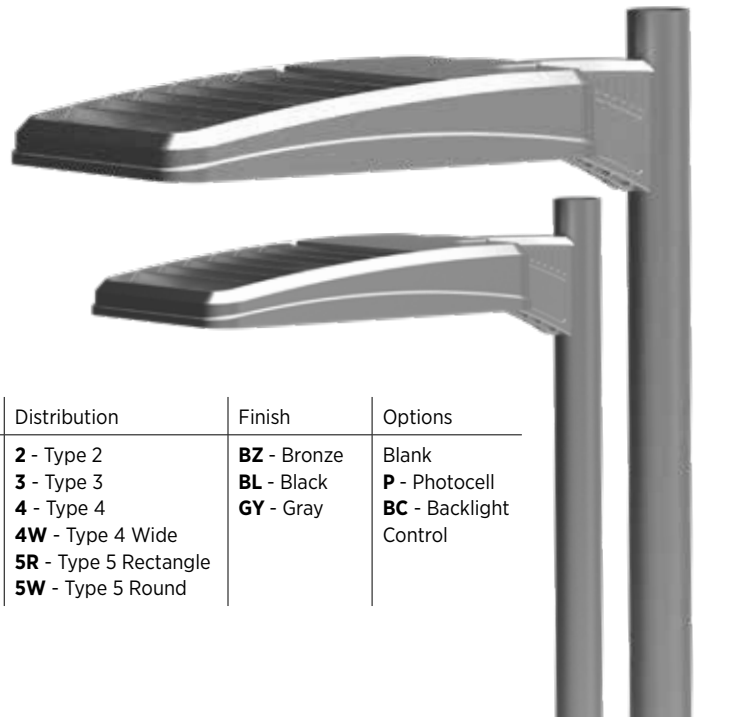

Series	Wattage	Lumens	Distribution	Finish	Options
PCPAS - Parking/Area Small	55LED - 55W*	5900-6260	2 - Type 2	BZ - Bronze	Blank
PCPAL - Parking/Area Large	80LED - 80W*	8800-9400	3 - Type 3	BL - Black	P - Photocell
	135LED - 135W**	15500-18000	4 - Type 4	GY - Gray	BC - Backlight Control
	180LED - 180W**	19800-22650	4W - Type 4 Wide		
	235LED - 235W**	23800-27400	5R - Type 5 Rectangle 5W - Type 5 Round		



*Small only

**Large only

Post Top Shade

Decorative Post Top Shade Luminaire

The PCPTS series is ideal for parking, area and pedestrian lighting applications. The full top shade design provides the benefit of full cut-off. Luminaire is offered in 2,600 to 10,500 lumen versions. All models standard as 4000K CCT.

Series	Wattage	Lumens	Distribution	Finish	Options
PCPTS	27LED - 27W	2600-2950	2 - Type 2	BZ - Bronze BL - Black	Blank PC120 - 120V Photocell PC277 - 277V Photocell BC - Backlight Control
	55LED - 55W	4900-5470	3 - Type 3		
	80LED - 80W	7400-8200	4 - Type 4		
	110LED - 110W	9800-10900	4W - Type 4 Wide 5R - Type 5 Rectangle 5W - Type 5 Round		

Size: 25-1/2" W., 24-1/4" ht.



Post Top Designer

Designer Post Top Luminaire

The PCPTD series offers decorative and contemporary aesthetics, and is ideal for area and pedestrian lighting applications. Luminaire is offered in 4,500 to 11,500 lumen versions. All models standard as 4000K CCT.

Series	Wattage	Lumens	Distribution	Finish	Options
PCPTD	55LED - 55W	4600-4750	3 - Type 3	BZ - Bronze BL - Black	Blank PC120 - 120V Photocell PC277 - 277V Photocell
	80LED - 80W	6900-7100	4 - Type 4		
	110LED - 110W	9250-9500	5 - Type 5		

Size: 18-7/16" W., 36" ht.



Post Top Globe

Globe Post Top Luminaire

The PCPTG series offers a traditional globe design ideal for area and pedestrian lighting applications. Luminaire is offered in 2,000 to 4,500 lumen versions. All models standard as 4000K CCT.

Series	Wattage	Lumens	Distribution	Finish	Options
PCPTG	27LED - 27W	2350-2800	3 - Type 3	BZ - Bronze	Blank
	55LED - 55W	4220-4675	4 - Type 4 5 - Type 5	BL - Black	PC120 - 120V Photocell PC277 - 277V Photocell

Size: 16-3/5" W., 25" ht.



Bollards

Provides ideal low level lighting for sidewalks, courtyards, and pedestrian walkways. Available in round or square, and offers both asymmetric and symmetric distribution options. All models standard as 4000K CCT. Turtle friendly amber option available.

Series	Wattage	Lumens	Finish
PCBOR - Bollard Round	ASY - 27w LED	650 - 940	BZ - Bronze BL - Black
PCBOS - Bollard Square	SYM - 41w LED	1440 - 1780	
	SYMAMB - 20w LED	314, 590 NM	

Size: Round - 6.75" sq., 42" ht. Square - 7" dia., 42" ht.



PCBOR

PCBOS

PCAD Series

Designer Series Parking/Site Luminaire

The PCADS and PCADL series are designed for parking and area lighting applications utilizing high power LEDs, while providing contemporary aesthetics. The PSADS/PCADL is offered in 6,000 to 12,500 lumen versions.



Series	Wattage	Lumens	Color Temp	Distribution	Finish	Options
PCADS - Designer Small	55LED - 55W	6000-6450	3K - 3000K, 70CRI	2 - Type 2	BZ - Bronze	Blank
PCADL - Designer Large	80LED - 80W	9000-9700	4K - 4000K, 70CRI	3 - Type 3	BL - Black	PC120 - 120V Photocell
	110LED - 110W *	12000-12900		4 - Type 4	GN - Green	PC277 - 277V Photocell
				4W - Type 4 Wide		BC - Backlight Control
				5R - Type 5 Rectangle		
				5W - Type 5 Round		




*Large only


Decorative Arms

Series	Profile	Shaft Sizes	Arrangement	Mounting
AA-25	W - Wall Mount	4 - 4"	A - Wall (single)	P - Pendant
AA-39	S - Smooth	5 - 5"	B - Single	T - Tenon
AA-44	F - Fluted		C - Double	
AA-52				


AA-25

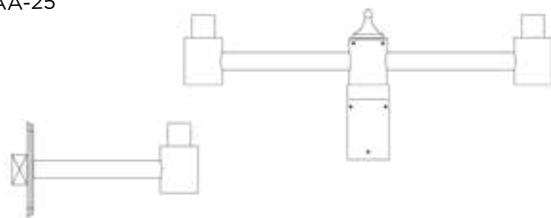


AA-39

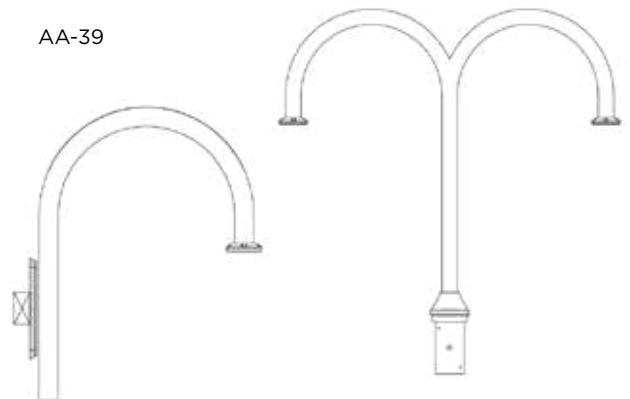

AA-44

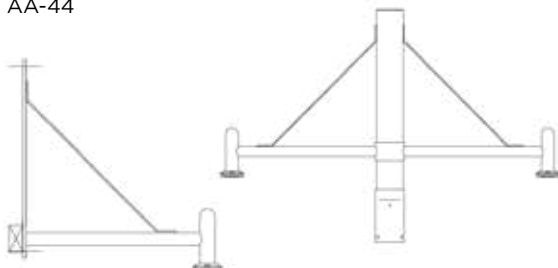

AA-52

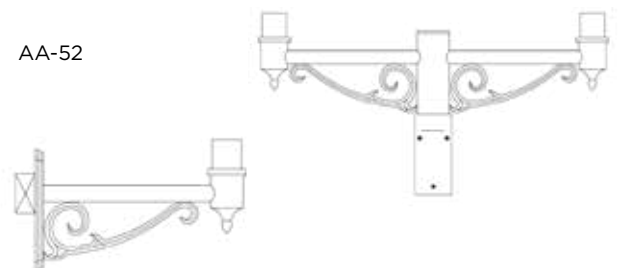

Poles

Constructed with exacting standards both our aluminum and steel products meet strict guidelines for quality, strength and finish durability. Protecting your investment for years is our Lektrocote® powder paint finish, available in bronze, black and textured green. From shaft cutting through finishing, quality control inspections are conducted throughout a highly automated process.



RSS-P



SSS-P



FLAK



CEAK



CENA

Steel Products

Series	Construction	Shaft Sizes	Wall Thickness	Lengths
SSS-P	Square Straight Steel	4", 5"	.125", .188"	10 - 30 ft
RSS-P	Round Straight Steel	4", 4.5", 5"	.125", .188"	10 - 25 ft

Aluminum Products - Anchor Base

Series	Construction	Shaft Sizes	Wall Thickness	Lengths
SSA-P	Square Straight Aluminum	4", 5"	.125", .188"	8 - 25 ft
RSA-P	Round Straight Aluminum	3", 4", 4.5", 5"	.125", .188", .250"	8 - 25 ft
RSA-P-F	Round Straight Aluminum Fluted	4", 5"	.188"	8 - 24 ft
RTA-P	Round Tapered Aluminum	4", 5"	.125"	10 - 20 ft

Aluminum Products - Direct Burial

Series	Construction	Shaft Sizes	Wall Thickness	Lengths
RSA-P-DBE-S	Round Straight Aluminum Smooth	3", 4", 5"	.125", .188", .250"	8 - 16 ft
RSA-P-DBE-F	Round Straight Aluminum Fluted	3", 4", 5"	.125", .188"	8 - 16 ft

Aluminum Products - Decorative


Series	Construction	Shaft Sizes	Wall Thickness	Lengths
RSA-P-CENA-S	Round Straight Aluminum Smooth	4"	.125", .188", .250"	10 - 24 ft
RSA-P-CENA-F	Round Straight Aluminum Fluted	4"	.188"	10 - 24 ft
RSA-P-CEAK-S	Round Straight Aluminum Smooth	4"	.125", .188", .250"	10 - 24 ft
RSA-P-CEAK-F	Round Straight Aluminum Fluted	4"	.188"	10 - 24 ft
RSA-P-FLAK-S	Round Straight Aluminum Smooth	4"	.125", .188", .250"	10 - 24 ft
RSA-P-FLAK-F	Round Straight Aluminum Fluted	4"	.188"	10 - 24 ft

Composite Poles

Composite construction allows for durability, impact resistance, corrosion resistance and low maintenance. Light weight allows for labor and time savings, oftentimes without use of heavy equipment, while maintaining structural integrity, allowing for resistance of wind loads up to 180 mph. Ideal applications include residential, multi-family, hotel/motel, assisted living, and light commercial.


Composite Products

Series	Construction	Shaft	Lengths
RTC-P-XX-SM	Round Tapered Fiberglass	Smooth	10 - 25 ft
RTC-P-XX-FL	Round Tapered Fiberglass	Fluted	10 - 25 ft

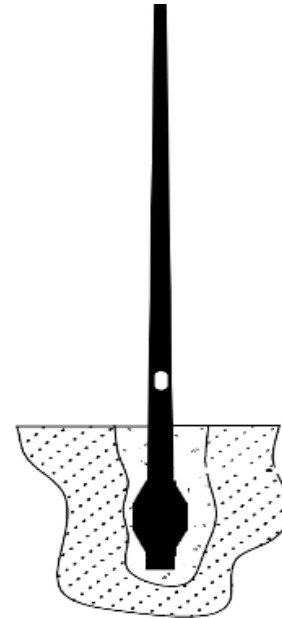


Distribution Types

Our offering of area and post-top luminaires allow for options for distribution types. These distribution options range from types 2-5, and each type provides a different performance. Below is each type explained in detail to provide a better understanding of luminaire type performance.




Type 2 – A long, narrow distribution of light, commonly used for roadway and entrance lighting.



Type 3 – A forward distribution of light, commonly used for parking areas and general roadway lighting.




Type 4 – A forward distribution of light, commonly used for parking areas and area illumination from wall mounting.

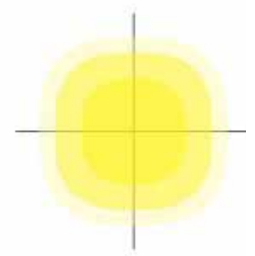


Type 5 – A circular or square distribution of light that has near equal intensity in all directions. Generally used in centers of parking areas.

ASCE7-05 Wind Map

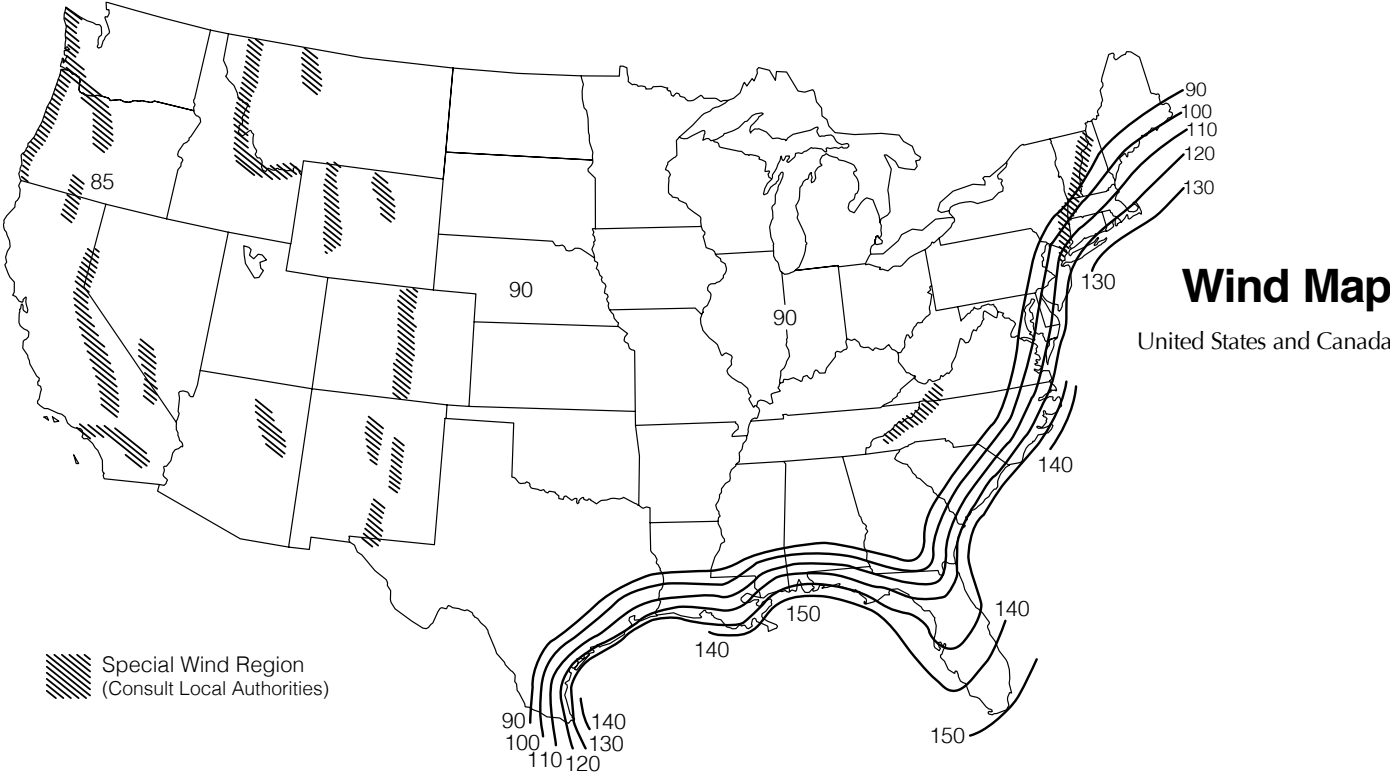

Florida Region Wind Map

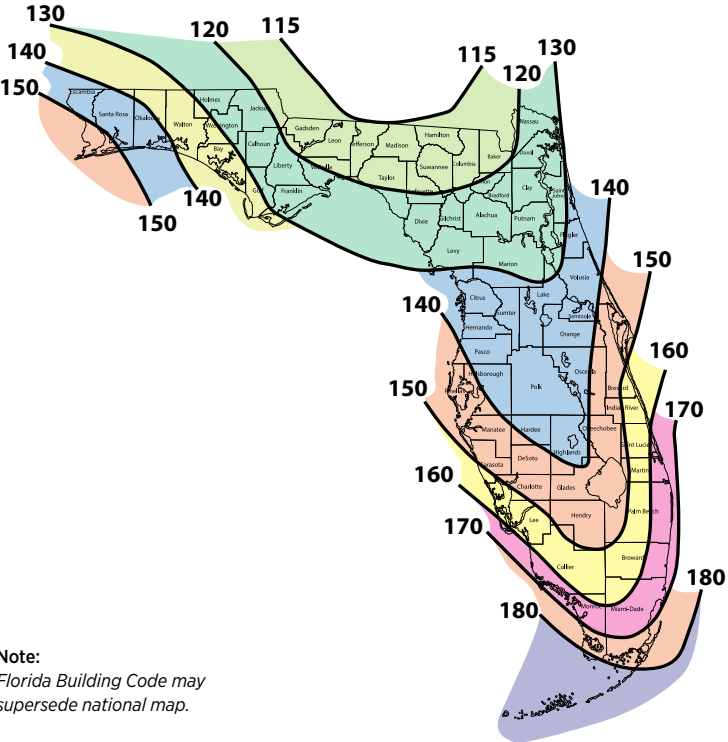

Note:
Florida Building Code may supersede national map.

Wind Map Notes

- Values are based on 50 year mean recurrence interval 30' above grade.
- Hawaii has an 105 mph wind velocity.
- Puerto Rico has a 125 mph wind velocity.
- Caution must be exercised in determining wind velocities in special wind areas such as:
 - Mountainous Regions
 - Areas surrounding the Great Lakes or other large bodies of water or open land.
 - Areas subject to extreme wind conditions, such as hurricanes, typhoons, cyclones, and tornadoes.
 - Areas adjacent to airports.
 - Any specific area with a known or suspected abnormally high intermittent wind condition caused by geography, adjacent structures, or other specific local conditions that may not be recorded in National Weather Service records.
- Allowable pole EPA for jobsite wind conditions must be equal to or greater than fixture EPA. Responsibility lies with the specifier for correct pole selection based on ASCE7-05 wind map and job location.
- The Wind Map is intended only as a general guide. Always consult local authorities to determine maximum wind velocities, gusting and unique wind conditions for each specific application.

Caution

- Wind speeds and listed EPAs are for ground mounted installations. Poles mounted on structures (such as bridges and buildings) must consider vibration and coefficient of height factors beyond this general guide. Consult AASHTO standards.
- Extreme Wind Events: Hurricanes, Typhoons, Cyclones, or Tornadoes expose poles to flying debris, wind shear, and other unpredictable aerodynamic forces not indicated by the wind velocity ratings.
- Pole Strength Limited Warranty: Standard, unmodified Progress Commercial Lighting Poles installed as recommended, undamaged by corrosion, or lack of maintenance, shall withstand steady wind conditions on each pole's Allowable Pole EPA chart. Installation of poles without luminaries, or attachment of any unauthorized accessories to poles shall void this warranty.

EPA Information

All allowable pole and fixture EPAs (Fixture Area x Drag Factor) are derived from the AASHTO standard (American Association of State Highway and Transportation Officials). Responsibility lies with the specifier for correct pole selection based on local codes and standards for the job location.

To obtain more information on AASHTO Standards for Lighting Equipment contact:

American Association of State Highway
and Transportation Officials
444 N. Capitol Street, NW, Suite 249
Washington, DC 20001
202 624-5800
www.aashto.org

AASHTO standards used are found in the following publications:

I-LTS-4 "Standard Specification for Structural Support for Highway Signs, Luminaries and Traffic Signals," (2001).

Important

Do not erect poles without luminaries in place. Any accessories attached to pole, or other modifications will compromise pole strength and may result in pole failure.

Maintenance

A regularly scheduled maintenance program must be established to insure the protective paint coating is intact, corrosion or structural damage has not occurred, and anchor bolt nuts are tight. Failure to do so could lead to pole collapse and personal injury.

Step Lights LED

Product No.	Finish	Size	Source	Input
P6827-0930K P6827-2030K P6827-3030K P6827-3130K	Brushed Nickel Antique Bronze White Black	5-1/4" W., 3-1/2" ht.	5w LED module, 100 lumens, 22 lumens/watt	120V

P6827-2030K



P6827-3030K



P6827-3130K



P6827-0930K

Product No.	Finish	Size	Source	Input
P6828-0930K P6828-2030K P6828-3030K P6828-3130K	Brushed Nickel Antique Bronze White Black	3-1/2" W., 5-1/4" ht.	5w LED module, 100 lumens, 22 lumens/watt	120V

P6828-2030K



P6828-3030K



P6828-3130K



P6828-0930K

Product No.	Finish	Size	Source	Input
P6829-0930K P6829-2030K P6829-3030K P6829-3130K	Brushed Nickel Antique Bronze White Black	2-7/8" W., 4-1/2" ht.	5w LED module, 84 lumens, 18 lumens/watt	120V

P6829-2030K



P6829-3030K



P6829-3130K



P6829-0930K

Product No.	Finish	Size	Source	Input
P6832-0930K P6832-2030K P6832-3030K P6832-3130K	Brushed Nickel Antique Bronze White Black	4-1/2" W., 2-7/8" ht.	4.5w LED module 65 lumens, 14 lumens/watt	120V

P6832-2030K



P6832-3030K



P6832-3130K



P6832-0930K

Integrated LED Low Voltage

Product No.	Finish	Size	Source	Input
P5246-31	Black	5-3/8" W., 2-3/8" ht.	1 LED, 1.5w	12V
P5295-31		5" dia., 4" ht.	1 LED, 3w	
P5296-31		4-1/8" dia., 2-1/4" ht.	3 LEDs, 1.5w	
P5299-31		4-1/2" dia., 6-5/8" ht.	1 LED, 3w	
P5245-20 P5245-31	Antique Bronze Black	6-1/2" dia., 20-3/4" ht.	1 LED, 1.5w	
P5247-09 P5247-31	Brushed Nickel Black	2-5/8" dia., 24" ht.	1 LED, 1.5w	
P5297-31	Black	7" dia., 16-1/2" ht.	1 LED, 1.5w	
P5298-31	Black	5-1/8" dia., 17-1/2" ht.	1 LED, 1.5w	



P5247-09

P5247-31



P5246-31



P5295-31



P5296-31



P5245-20



P5245-31



P5298-31



P5297-31



P5299-31

Outdoor Transformers

LED Low Voltage Transformer

Product No.	Finish	Description	Size
P8270-31	Black	LED transformer	120V
P8618-31	Black	Ground stake	8-3/4"



P8618-31



P8270-31





Building Exterior

BENEFICIAL LIGHTING SOLUTIONS FOR A
WELL-DESIGNED COMMERCIAL EXTERIOR

Our comprehensive line of exterior solutions includes site/area lighting, landscape lighting, entryway, egress and more lighting options to give your business a competitive edge by improving property values and reducing utility costs.

Commercial Floodlights

Product No.	Finish	Size	Source	Input
PCOEF-30LED-4K-KM-BZ PCOEF-30LED-4K-YM-BZ	Bronze	7-1/4" W., 7" ht., 1-1/2" D.	27w LED, 5000K, 2040 lumens	120 - 277V, 50 or 60 Hz 
PCOEF-50LED-4K-KM-BZ PCOEF-50LED-4K-YM-BZ		8-1/2" W., 8" ht., 1-7/8" D.	53w LED, 5000K, 4825 lumens	
PCOLF-15LED-3K-KM-BZ		3" W., 5-1/4" ht., 4-1/4" D.	14w LED, 3000K, 1495 lumens	



PCOEF-30LED-4K-YM-BZ
Shown as yoke mount.
Knuckle mount also available.





PCOEF-50LED-4K-YM-BZ
Shown as yoke mount.
Knuckle mount also available.



PCOLF-15LED
Shown with canopy mount accessory.
Accessories sold separately.

Commercial Canopy

Product No.	Finish	Size	Source	Input
PCOCY-45LED-5K-BZ	Bronze	10" L., 10" W., 3-5/8" ht.	45w LED, 5000K, 80CRI, 4700 lumens	120 - 277V, 50 or 60 Hz  
PCOCY-80LED-5K-BZ		14" L., 14" W., 4" ht.	80w LED, 5000K, 80CRI, 9660 lumens	





PCOCY-45LED-5K-BZ



PCOCY-80LED-5K-BZ

PCOWC SERIES Wall Pack

Full cutoff distribution with no uplight. Turtle friendly amber option available (AMB).

Product No.	Finish	Size	Source	Input
PCOWC-20LED-20	Bronze	8.22" W., 5.25" ht., 4.81" dia.	18w LED, 4000K, 1421 lumens	120 - 277V, 50 or 60 Hz   *Turtle Friendly ONLY PCOWC-45LED-20AMB
PCOWC-30LED-20		10.25" W., 5.6" ht., 6.25" dia.	29w LED, 4000K, 2246 lumens	
PCOWC-45LED-20		10.25" W., 5.6" ht., 6.25" dia.	45w LED, 4000K, 3096 lumens	
PCOWC-45LED-20-AMB		10.25" W., 5.6" ht., 6.25" dia.	32w LED, 590 NM	
PCOWC-20LED-28	White	8.22" W., 5.25" ht., 4.81" dia.	18w LED, 4000K, 1421 lumens	
PCOWC-30LED-28		10.25" W., 5.6" ht., 6.25" dia.	29w LED, 4000K, 2246 lumens	
PCOWC-45LED-28		10.25" W., 5.6" ht., 6.25" dia.	45w LED, 4000K, 3096 lumens	
PCOWC-20LED-82	Metallic Gray	8.22" W., 5.25" ht., 4.81" dia.	18w LED, 4000K, 1421 lumens	
PCOWC-30LED-82		10.25" W., 5.6" ht., 6.25" dia.	29w LED, 4000K, 2246 lumens	
PCOWC-45LED-82		10.25" W., 5.6" ht., 6.25" dia.	45w LED, 4000K, 3096 lumens	



PCOWC-20LED-20





PCOWC-45LED-20



PCOWC-30LED-20

Commercial Wall Pack

Product No.	Finish	Size	Source	Input
PCOWP-30LED-4K-BZ	Bronze	14-3/8" W., 9-1/4" ht., 7-3/8" D.	30w LED, 4000K, 80CRI, 351 lumens	120 - 277V, 50 or 60 Hz  
PCOWP-60LED-4K-BZ		8-9/16" W., 8-9/16" ht., 9-3/4" D.	60w LED, 4000K, 80CRI, 6700 lumens	
PCOWF-50LED-4K-BZ		14" W., 8-1/4" ht., 8-1/4" D.	50w LED, 4000K, 80CRI, 6350 lumens, full cutoff distribution with no uplight	



PCOWP-30LED-4K-BZ



PCOWF-50LED-4K-BZ







PCOWP-60LED-4K-BZ

Aluminum Cylinders LED

Sleek, cylindrical forms in elegant finish selections. Die-cast aluminum wall brackets and heavy-duty aluminum framing. Fade and chip-resistant. UL listed for wet locations when used with lens cover. Dark Sky compliant for down light only. 90+ CRI.

3" Aluminum Cylinders LED

Product No.	Finish	Description	Size	Source	Input
P563000-020-30K P563000-030-30K P563000-143-30K P563000-147-30K	Antique Bronze White Graphite Satin Nickel	One-light down For wet locations	5-1/2" W., 5-5/8" ht.	One 12w integrated LED, 3000K, 90CRI 900 delivered lumens	120V    
P563001-020-30K P563001-030-30K P563001-143-30K P563001-147-30K	Antique Bronze White Graphite Satin Nickel	Two-light down For wet locations	5-1/2" W., 8-1/4" ht.	Two 24w integrated LED, 3000K, 90CRI 1800 delivered lumens	



P563000-020-30K



P563000-030-30K



P563000-143-30K



P563000-147-30K



P563001-020-30K



P563001-030-30K





P563001-143-30K





P563001-147-30K

5" Aluminum Cylinders LED

Product No.	Finish	Size	Source	Input
P5674-20/30K P5674-30/30K P5674-31/30K P5674-82/30K	Bronze White Black Metallic Gray	5" W., 7-1/4" ht. Extends 8". H/CTR 2-1/2".	One 17w integrated LED, 3000K, 90CRI 531 delivered lumens up/down	120V   <i>*Dark Sky ONLY</i> <i>P5674 & P5774</i>
P5675-20/30K P5675-30/30K P5675-31/30K P5675-82/30K	Bronze White Black Metallic Gray	5" W., 14" ht. Extends 8". H/CTR 7".	Two 17w integrated LED, 3000K, 90CRI 1025 delivered lumens up/down	
P5774-20/30K P5774-30/30K P5774-31/30K P5774-82/30K	Bronze White Black Metallic Gray	5" W., 6-1/2" ht.	One 17w integrated LED, 3000K, 90CRI 764 delivered lumens	




6" Aluminum Cylinders LED

Product No.	Finish	Size	Source	Input
P5641-20/30K P5641-30/30K P5641-31/30K P5641-82/30K	Bronze White Black Metallic Gray	6" W., 12" ht. Extends 8-7/8". H/CTR 4-1/2".	One 29w integrated LED, 3000K, 90CRI 1800 delivered lumens up/down	120V   <i>*Dark Sky ONLY</i> <i>P5641 & P5741</i>
P5642-20/30K P5642-30/30K P5642-31/30K P5642-82/30K	Bronze White Black Metallic Gray	6" W., 18" ht. Extends 8-7/8". H/CTR 8".	Two 29w integrated LED, 3000K, 90CRI 2566 delivered lumens	
P5741-20/30K P5741-30/30K P5741-31/30K P5741-82/30K	Bronze White Black Metallic Gray	6" dia., 12" ht.	One 29w integrated LED, 3000K, 90CRI 1800 delivered lumens	




Aluminum Squares LED

Heavy-duty aluminum construction, die-cast aluminum wall bracket. UL listed for wet locations. Powder coat for chipping and fading resistance. Dark Sky compliant for down light only. 90+ CRI.

Product No.	Finish	Size	Source	Input
P5643-20-30K P5643-30-30K P5643-31-30K P5643-82-30K	Bronze White Black Metallic Gray	6" W., 12" ht. Extends 8-7/8". H/CTR 4-1/2".	One 29w integrated LED, 3000K, 90CRI 1800 delivered lumens	120V  <i>*Dark Sky ONLY P5643</i>
P5644-20-30K P5644-30-30K P5644-31-30K P5644-82-30K	Bronze White Black Metallic Gray	6" W., 18" ht. Extends 8-7/8". H/CTR 8".	Two 29w integrated LED, 3000K, 90CRI 1800 delivered lumens. up/down	



P5643-20-30K



P5643-30-30K



P5643-31-30K



P5643-82-30K



P5644-20-30K



P5644-30-30K




P5644-31-30K



P5644-82-30K

Cylinder Accessories

Product No.	Finish	Description	Size
P8741-20 P8741-30 P8741-31	Antique Bronze White Black	Pendant kit adapts P5741 ceiling fixture to 6", 12" or 18" stem mounting. Includes canopy, hang-straight swivel, 6" and 12" sections with coupling.	
P860045-031 P860045-030	Black White	Round cylinder cover. Water proof version.	6" dia., 4/5" ht.
P860046-031 P860046-030	Black White	Round cylinder cover. Water proof version.	5" dia.
P860047-031 P860047-030	Black White	Square cylinder cover. Water proof version.	6" wd., 7/9" ht. Extends 6" dp.

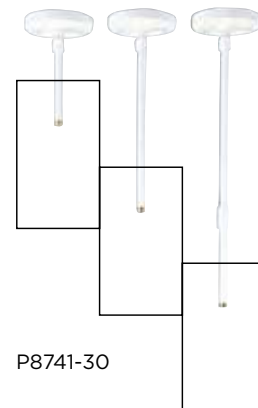

P8741-30



P860045-031



P860046-031



P860045-030



P860046-030






P860047-030



P860047-031

Brookside LED

Get inspired from vintage undertones and train station styling with this energy efficient outdoor lantern collection. Available in aluminum with Gilded Iron finish, solid brass with Antique Nickel finish or Solid Copper that ages to a patina finish. Dark Sky compliant.

Product No.	Finish	Size	Source	Input
P5723-7130K9 P5723-8130K9	Gilded Iron Antique Nickel	12" W., 12-1/4" ht. Extends 13-1/4". H/CTR 6-7/8"	One 17w LED module, 3000K, 90CRI 1211 source lumens	120V   






P5723-7130K9



P5723-8130K9

District LED

The outdoor lanterns from the District Collection features a metal shade that offers an industrial-inspired design. The versatile vintage form can be used in outdoor applications. Dark Sky compliant.

Product No.	Finish	Size	Source	Input
P5622-2030K9	Antique Bronze	8" W., 8-1/4" ht. Extends 10-1/4". H/CTR 4-1/8".	One 9w LED module, 3000K, 90CRI 623 source lumens	120V   
P5623-2030K9	Antique Bronze	12" W., 10-1/2" ht. Extends 13-1/4". H/CTR 5".		




P5622-2030K9



P5623-2030K9

Cedar Springs

A fun take on the traditional warehouse shade, the Cedar Springs Collection features a signature gooseneck arm and a smooth, simple, metal shade. This modern collection provides excellent task lighting for reading a book in your bedroom or illuminating a doorway in your home. Dark Sky Compliant.

Product No.	Finish	Size	Source
P550070-030	White	13-1/4" dia., 9-1/2" ht.	One medium base lamp, 100w max. 
P550070-031	Black		
P550070-039	Red		
P550070-079	Pistachio		
P550070-082	Metallic Gray		
P550070-091	Navy		



P550070-030



P550070-031



P550070-039




P550070-079



P550070-082



P550070-091

Product No.	Finish	Size	Source
P560091-030	White	13-1/4" W., 11-1/4" ht. Extends 21-5/8". H/CTR 7-1/4".	One medium base lamp, 100w max. 
P560091-031	Black		
P560091-039	Red		
P560091-079	Pistachio		
P560091-082	Metallic Gray		
P560091-091	Navy		



P560091-030



P560091-031



P560091-039



P560091-079






P560091-082



P560091-091

Bell LED

Featuring nautical undertones, the Bell outdoor collection offers cage lights reminiscent of industrial architecture. Ideal for use in both interior and exterior settings, this LED fixture is available in convertible ceiling/pendant and wall mount options.

Product No.	Finish	Size	Source	Input
P5676-2030K9 P5676-13630K9	Antique Bronze Textured Graphite	5-1/2" W., 10-5/8" ht. Extends 7-3/8". H/CTR 3".	One 9w LED module, 3000K, 90CRI 623 lumens	120V   






P5676-2030K9



P5676-13630K9

Endorse LED

Endorse celebrates the traditional form of a gas-powered coach light with illumination from a modern LED source. A die-cast aluminum, powder coated frame creates an intriguing visual effect with clear beveled glass.

Product No.	Finish	Size	Source	Input
P6058-3130K9	Black	6-3/4" W., 12" ht. Extends 7-5/8". H/CTR 3-1/4".	One 9w LED module, 3000K, 90CRI 623 lumens	120V   
P6056-3130K9	Black	8-3/4" W., 14-3/4" ht. Extends 9-3/4". H/CTR 4".		
P6057-3130K9	Black	10-3/4" W., 17-3/4" ht. Extends 11-3/4". H/CTR 4".		



P6056-3130K9






P6057-3130K9



P6058-3130K9

Westport LED

Westport LED offers traditional styling to complement a variety of home décor options. A durable, die-cast aluminum frame cradles a softly diffused, seeded glass shade.

Product No.	Finish	Size	Source	Input
P5862-2030K9 P5862-3130K9	Antique Bronze Black	6-7/8" W., 10-1/4" ht. Extends 8-3/8". H/CTR 3-1/8".	One 9w LED module, 3000K, 90CRI 623 source lumens	120V   
P5863-2030K9 P5863-3130K9	Antique Bronze Black	9" W., 12-7/8" ht. Extends 10-3/8". H/CTR 3-3/4"		
P5864-2030K9 P5864-3130K9	Antique Bronze Black	11" W., 15-3/8" ht. Extends 12-7/8". H/CTR 4".	One 17w LED module, 3000K, 90CRI 1211 source lumens	



P5862-2030K9



P5862-3130K9



P5863-2030K9



P5863-3130K9






P5864-3130K9



P5864-2030K9

Bulkheads LED

Robust and energy efficient, LED bulkheads are a general-purpose luminaire. Comprised of a die-cast aluminum frame and polycarbonate diffuser. Fixtures are impact resistant and offer various mounting options and can be widely adopted for indoor and outdoor applications.

Product No.	Finish	Size	Source	Input
P3648-3030K9 P3648-3130K9	White Black	9-1/2" W., 4-3/8" ht. H/CTR 4-3/4".	One 17w LED module, 3000k, 90CRI 623 source lumens	  
P3649-3030K9 P3649-3130K9	White Black	6-1/2" W., 10-1/2" ht. Extends 4-1/2". H/CTR 5-1/4".	One 9w LED module, 3000k, 90CRI 623 source lumens	
P3650-3030K9 P3650-3130K9	White Black	9-1/2" W., 4-1/2" ht. H/CTR 4-3/4".	One 9w LED module, 3000k, 90CRI 623 source lumens	



P3648-3130K9
shown wall-mounted



P3648-3030K9
shown ceiling-mounted



P3649-3130K9
shown wall-mounted



P3649-3030K9
shown ceiling-mounted






P3650-3130K9
shown wall-mounted




P3650-3030K9
shown ceiling-mounted

Strata LED

The Strata features a modern, low profile design ideal for residential and multifamily applications. Energy efficient and functional, wall mounted, can be installed indoor and outdoor.

Product No.	Finish	Size	Source	Input
P560090-020-30K P560090-030-30K P560090-031-30K P560090-082-30K	Antique Bronze White Black Metallic Gray	6-5/8" W., 5-1/2" ht.	12w integrated LED, 3000K, 90CRI, 825 delivered lumens.	120V   



P560090-030-30K



P560090-082-30K







P560090-031-30K



P560090-020-30K

Cornice LED

Modern geometric outdoor LED sconces are designed to complement a range of residential and commercial architectural styles. ADA compliant. Available in Black, Antique Bronze and Metallic Gray finishes. Dark Sky compliant.

Product No.	Finish	Size	Source	Input
P5634-2030K9 P5634-3130K9	Bronze Black	5-1/4" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	One 9w LED module, 3000K, 623 lumens ADA	120V    
P5635-2030K9 P5635-3130K9	Bronze Black	6-1/8" W., 5" ht. Extends 4". H/CTR 2-3/8".	One 9w LED module, 3000K, 623 lumens ADA	



P5634-2030K9



P5634-3130K9





P5635-2030K9



P5635-3130K9

Z-1030 LED





A modern outdoor LED sconce with an architectural-inspired open linear frame and clear glass diffuser. Finished in Black, White, Metallic Gray or Antique Bronze.

Product No.	Finish	Size	Source	Input
P560051-020-30 P560051-030-30 P560051-031-30 P560051-082-30	Antique Bronze White Black Metallic Gray	5-1/8" W., 12" ht. Extends 5-3/4". H/CTR 2-1/4".	One 9w LED module, 3000K, 90CRI 624 source lumens	120V  
P560056-020-30 P560056-030-30 P560056-031-30 P560056-082-30	Antique Bronze White Black Metallic Gray	5-1/8" W., 20" ht. Extends 5-3/4". H/CTR 2-1/4".		



Z-1010 LED




A modern outdoor sconce with an open linear frame and seeded glass diffuser. Finished in Black, Satin White and Architectural Bronze.

Product No.	Finish	Size	Source	Input
P560029-031-30 P560029-129-30	Black Architectural Bronze	7-1/2" W., 16" ht. Extends 4". H/CTR 4-1/4".	One 9w LED module, 3000K, 90CRI 624 source lumens	120V    



Z-1020 LED

A modern outdoor sconce with white glass shade is suspended in a curved frame that serves as a reflector when illuminated. Finished in Black or Architectural Bronze.

Product No.	Finish	Size	Source	Input
P560030-031-30 P560030-129-30	Black Architectural Bronze	7-1/2" W., 13-1/2" ht. Extends 4-3/4". H/CTR 11-1/8".	One 9w LED module, 3000K, 90CRI 670 source lumens	120V   






P560030-031-30



P560030-129-30

Valera LED

Transform outdoor settings with a bold, straightforward style. Double linear details finished in Brushed Nickel or Antique Bronze over a white acrylic diffuser. Die-cast aluminum construction. T24 applies to outdoor installation only.

Product No.	Finish	Size	Source	Input
P5800-12930K9	Brushed Nickel Architectural Bronze	5-5/8" W., 8" ht. Extends 4". H/CTR 4". ADA	One 9w LED module, 3000K, 90CRI 623 source lumens	120V   
P5801-12930K9	Brushed Nickel Architectural Bronze	8-5/8" W., 11" ht. Extends 4". H/CTR 5-1/2". ADA	One 17w LED module, 3000K, 90CRI 1211 source lumens	
P5806-0930K9 P5806-12930K9	Brushed Nickel Architectural Bronze	5-5/8" W., 16" ht. Extends 4". H/CTR 8". ADA	Two 9w LED modules, 3000K, 90CRI 623 source lumens	



P5800-12930K9



P5801-12930K9






P5806-0930K9



P5806-12930K9

Z-1070 LED

Tranquility is yours with the Z-10170 Collection, whose sleek rectangular back plate hold a curved etched glass shade trimmed top and bottom with minimalist metal caps.

Product No.	Finish	Size	Source	Input
P560208-031-30 P560208-082-30	Black Metallic Gray	6" W., 12-9/16" ht. Extends 3-3/4". H/CTR 6-1/4".	11w integrated LED, 3000K, 90CRI, 528 delivered lumens.	120V   
P560209-031-30 P560209-082-30	Black Metallic Gray	6" W., 23-1/8" ht., wire 6". Extends 3-3/4". H/CTR 11-9/16".	22w integrated LED, 3000K, 90CRI, 1019 delivered lumens.	



P560208-031-30



P560208-082-30






P560209-031-30



P560209-082-30

Z-1080 LED

Smooth, elongated frames hold a simple shade banded top and bottom, exuding the modern attitude that is a hallmark of the Z-1080 collection.

Product No.	Finish	Size	Source	Input
P560210-031-30 P560210-082-30	Black Metallic Gray	5" W., 13" ht. Extends 3". H/CTR 6-1/2".	11w integrated LED, 3000K, 90CRI, 415 delivered lumens.	120V   
P560211-031-30 P560211-082-30	Black Metallic Gray	5" W., 23-1/2" ht. Extends 3". H/CTR 11-3/4".	22w integrated LED, 3000K, 90CRI, 847 delivered lumens.	



P560210-031-30



P560210-082-30






P560211-031-30



P560211-082-30

Z-1060 LED

Get even more of the home décor compliments you love with the classic Z-1060 Collection. A minimalist, yet welcoming cylinder-shaped, etched opal glass shade hangs from a handsome black ceiling plate. This collection is perfect for casting a welcoming glow near an entryway or for guiding guests and family down a hallway.

Product No.	Finish	Size	Source	Input
P550071-031-30	Black	4-1/2" dia., 4-3/8" ht., wire 6".	9w Module LED, 3000K, 90CRI, 624 source lumens	120V   
P560072-031-30	Black	4-1/2" W., 4-1/2" ht. Extends 4-3/4". H/CTR 2-1/4".	One 9w LED module, 3000K, 90CRI, 624 source lumens.	
P560073-031-30	Black	4-1/2" W., 4-1/2" ht. Extends 4-3/4". H/CTR 2-1/4".	One 9w LED module, 3000K, 90CRI, 624 source lumens.	



P560072-031-30






P560073-031-30



P550071-031-30

Z-1090 LED

An elongated frame and clean, crisp lines are the hallmarks of the Z-1090 Collection. A modern take on an open-cage design is manifested by a rectangular silhouette with an open bottom through which a stunning glow shines.

Product No.	Finish	Size	Source	Input
P560137-028-30 P560137-031-30	Satin White Black	4-1/2" W., 16" ht., wire 6". Extends 4-3/8". H/CTR 2-1/2".	9w Module LED, 3000K, 90CRI, 624 source lumens.	120V   



P560137-031-031



P560137-028-30

000

18

EXIT

♂ ♀

EXIT

18 North
N. 18th Street
& North Main Street
Springfield, Illinois





Egress Lighting

HIGHLY SPECIFIABLE SOLUTIONS OFFERING
ENERGY SAVINGS BENEFITS AND SUPERIOR
PERFORMANCE

Our selection of life safety and emergency egress products is specifically designed for improved performance, energy savings and longer service life for light commercial and residential emergency lighting needs.

Exit Sign

The PETPE Series offers quality and value with a compact and attractive LED based emergency exit. The white housing is made of high impact UL flame rated thermoplastic. Snap together canopy, housing, removable chevrons for quick and easy installation. Universal single or double-face. Remote capacity option will run 4 PERHC Series single remote Source-heads or 2 double PERHC remotes.

Product No.	Finish	Size	Source	Input
PETPE-UR-30	White/Red	11.6" W., 7.2" ht., 2" dia.	LED	120 or 277VAC
PETPE-UR-30-RC Remote Capacity				
PETPE-UG-30	White/ Green			
PETPE-UG-30-RC Remote Capacity				



PETPE-UR-30-RC



PETPE-UG-30-RC

Combo Exit/Emergency

The PECUE Series offers quality and value with a compact and attractive LED based combination emergency exit. The white housing and Source-heads are made of high impact UL flame rated thermoplastic. Snap together canopy, housing, removable chevrons for quick and easy installation. Universal single or double-face. Remote capacity unit will run 4 PERHC Series single remote Source-heads or 2 double PERHC remotes.

Product No.	Finish	Size	Source	Input
PECUE-UG-30	White/ Red	18" W., 7.2" ht., 2" dia.	LED	120 or 277VAC
PECUE-UG-30-RC Remote Capacity				
PECUE-UR-30	White/ Green			
PECUE-UR-30-RC Remote Capacity				



PECUE-UR-30



PECUE-UG-30

Aluminum Exit Sign

The PEALE Series offers quality and value with a compact and attractive Thin Die-Cast aluminum Exit sign. Exit face illumination by low energy, long-life red or green ultra bright LED's. The Exit face-plate is brushed aluminum with black edges and 6" letters with a red or green diffuser. Single-face models can be wall, end or ceiling mounted. Double-face models are end or ceiling mounted only. Includes canopy, universal mounting plate and a battery for emergency operation. Test switch and AC-on indicator are located at bottom center. Directional indication made by knock-out chevrons.

Product No.	Finish	Side / Color	Size	Source	Input
PEALE-DG-EM-16	Brushed Aluminum	Double / Green	11.6" W., 7.75" ht., .875" dia.	LED	120 or 277VAC
PEALE-DR-EM-16		Double / Red			
PEALE-SG-EM-16		Single / Green			
PEALE-SR-EM-16		Single / Red			



PEALE-SG-EM-16



PEALE-SG-EM-16

Wet Location Exit Sign

The PEWLE Series offers quality and value with a wet location rated emergency Exit sign. Housing and face-plate made from impact resistant UV stabilized polycarbonate. Housing is corrosion resistant and face-plate is fully gasketed. Exit face illumination by low energy, long-life red or green ultra bright LED's. The Exit letters measure 6" with a red or green diffuser. Single-face models can be wall mounted by use of molded-in template, end or ceiling mounted. Double-face models are end or ceiling mounted only. Includes canopy and universal mounting plate. Water-proof test switch and AC-on indicator located at Exit bottom. Directional indication made by place-able chevrons. Conduit entry KO's located in top and side housing, with conduit fitting included.

Product No.	Finish	Side / Color	Size	Source	Input
PEWLE-SR-30	White	Single / Red	12.5" W., 9.3" ht., 2.5" dia.	LED	120 or 277VAC
PEWLE-DR-30		Double / Red			
PEWLE-SG-30		Single / Green			
PEWLE-DG-30		Double / Green			



PEWLE-SR-30



PEWLE-SG-30

Edge-Lit Emergency Exit

The PEESE/PEERE Series offers quality and value with an Edge-Lit based emergency exit. The PEESE/PEERE is ideal for architectural applications and offers surface and recessed mounting options. The acrylic panels are ultrasonically welded and taped at the edges to maximize illumination and visibility. The Exit panel can be ratcheted to various angles for mounting to angled surfaces. The housing finish and trim-plate is brushed aluminum. Recessed mount model comes with a full recessed box complete with integrated caddy-bar assembly. Surface mount model has a clam-shell design for easy installation and access to internal circuitry. Canopy and mounting hardware included. All models are for emergency operation complete with a NiCad battery, status LED and Push-to-Test switch.

Product No.	Finish	Side / Color	Mount	Size	Source	Input
PEESE-DG-16	Brushed Aluminum	Double / Green	Surface	13.3" W., 11" ht., 4.25" dia.	LED	120 or 277VAC
PEESE-DR-16		Double / Red				
PEESE-SG-16		Single / Green				
PEESE-SR-16		Single / Red				

Product No.	Finish	Side / Color	Mount	Size	Source	Input
PEERE-DG-16	Brushed Aluminum	Double / Green	Recessed	16.88" W., 11.13" ht., 5.5" dia.	LED	120 or 277VAC
PEERE-DR-16		Double / Red				
PEERE-SG-16		Single / Green				
PEERE-SR-16		Single / Red				



PEESE-SR-16
Surface Mount



PEERE-SR-16 Recessed Ceiling
Mount Shown



Wall Mount Shown

Emergency Light

The PE2EU Series offers quality and value with a compact and attractive LED based emergency light. The white housing and Source-heads are fully adjustable and glare-free. Snap together design for quick and easy installation with option of Wall or Ceiling mount. Remote capacity unit will run a double-head remote or 2 single-head remotes of the PERHC Series.

Product No.	Finish	Size	Source	Input
PE2EU-30	White	9" W., 4" ht., 2.75" dia.	LED	120 or 277VAC
PE2EU-30-RC Remote Capacity				



PE2EU-30

Indoor/Outdoor Remote Heads

The PERHC Series offers quality and value with a compact and attractive LED based remote emergency light. Source-heads are fully adjustable and glare-free. The remote Source are driven by the Progress remote capacity Exit combo or Emergency Light. The Outdoor Remote Source-heads are fully gasketed and weatherproof to ensure operation in wet environments. Must be used with PETPE, PE2EU, and PECUE remote capacity models.

Product No.	Finish		Size	Source
PERHC-SG-ID-30	White	Indoor	4.6" W., 4.6" ht., 2.6" dia.	Single LED
PERHC-DB-ID-30			6.7" W., 4.7" ht., 2.5" dia.	Double LED
PERHC-SG-OD-30		Outdoor	4.5" W., 4.5" ht., 6.7" dia.	Single LED
PERHC-DB-OD-30			7.4" W., 4.5" ht., 5.6" dia.	Double LED



PERHC-SG-ID-30



PERHC-DB-OD-30

Normally On/Off Outdoor Emergency

The PEOEU Series offers LED performance in “normally on” AC and emergency lighting modes. The unit has a prismatic polycarbonate refractor with a durable die-cast aluminum housing available with durable powder coated finish in dark bronze, nickel or white. The housing is fully sealed and gasketed. It is designed for wall mounting with a universal K/O pattern in the back-plate for installation to most standard size junction boxes. Illumination is provided by 2 high power LEDs driven at 3 watts each. LED color at 5500K.

Series	Description	Finish	Size	Source	Input
PEOEU-EM-20	Emergency Battery	Bronze	6.54" W., 10.47" ht., 3.78" dia.	LED, 223 lumens in AC mode, 5000K, 261 lumens in battery mode	120 or 277VAC, 50 or 60 Hz
PEOEU-EM-20-HTR	Emergency Battery w/ heater option	Bronze			



PEOEU-EM-20-HTR

Wet Location Emergency Light

The PE2WL offers LED performance and value with a compact and attractive wet location LED based emergency light. The gray housing is made of corrosion resistant UV stabilized polycarbonate. Source-head consists of metalized high-performance reflector and 15 ultra-bright LED's with tempered glass lens. Includes external mounting brackets for ease of installation. The PE2WL has adequate capacity to run 1 each PEWLH double head or 2 PEWLH single-head remotes at 9.6 VDC for 90 minutes.

Product No.	Finish	Size	Source	Input
PE2WL-82	Metallic Grey	8" W., 12.2" ht.	LED	120 or 277V AC input

Product No.	Description	Finish	Size
PEWLH-SG-82	Single Head	Metallic Grey	7" ht., 4.25" W., 4.5" dia.
PEWLH-DB-82	Double Head		7" ht., 10" W., 4.5" dia.



PEWLH-SG-82

PE2WL-82





Building Interior

MAINTAIN OR IMPROVE THE QUALITY OF LIGHT IN ANY ENVIRONMENT

Our high-performance energy solutions for conference rooms, lobbies, restrooms, hallways and other spaces can dramatically reduce energy costs while positively impacting the value and marketability of your commercial real estate.

Recessed Performance

Product No.	Size	Source	Input
PCICT-LED-22-30K	23-7/8" L., 4" ht., 23-7/8" W.	32w LED, 3000K, 3600 Lumens	120 - 277V, 50 or 60 Hz
PCICT-LED-22-35K		32w LED, 3500K, 3700 Lumens	
PCICT-LED-22-40K		32w LED, 4000K, 3750 Lumens	
PCICT-LED-24-30K	47-7/8" L., 4" ht., 23-7/8" W.	40w LED, 3000K, 4770 Lumens	
PCICT-LED-24-35K		40w LED, 3500K, 4900 Lumens	
PCICT-LED-24-40K		39w LED, 4000K, 4990 Lumens	



PCICT-LED-22-30K



PCICT-LED-24-30K

Low Profile Wraparound

Product No.	Size	Source	Input
PCIAW-LED-4-35K	48" L., 9" ht., 3-1/16" W.	138w LED, 3500K, 4000 Lumens	120 - 277V, 50 or 60 Hz



PCIAW-LED-4-35K

Stairwell Luminaire

Product No.	Size	Source	Input
PCISW-LED-4-35K	54" L., 4" ht., 6" W.	52w LED, 3500K, 5000 Lumens	120 - 277V, 50 or 60 Hz



PCISW-LED-4-35K

Linear Vapor Tight

Product No.	Size	Source	Input
PCIVT-LED-4-35K	51-3/4" L., 3-7/8" ht., 4-1/2" W.	37w LED, 3500K, 4000 Lumens	120 - 277V, 50 or 60 Hz



PCIVT-LED-4-35K

Low Profile Lens Strip

Product No.	Size	Source	Input
PCINS-LED-2-35K	24" L., 2-5/16" ht., 2-3/4" W.	18w LED, 3500K, 2000 Lumens	120 - 277V, 50 or 60 Hz
PCINS-LED-2-40K		18w LED, 4000K, 2000 Lumens	
PCINS-LED-4-35K	48" L., 2-5/16" ht., 2-3/4" W.	40w LED, 3500K, 4000 Lumens	
PCINS-LED-4-40K		40w LED, 4000K, 4000 Lumens	





PCINS-LED-2-35K



PCINS-LED-4-40K

Linear Cloud LED

White contoured shallow acrylic cloud lens in LED offers both form and function.

Product No.	Finish	Size	Source	Input
P7278-3030K9	White	26" L., 10-1/4" W., 3-1/4" ht.	27w integrated LED, 3000K, 90CRI, 1974 delivered lumens.	120V  
P7279-3030K9	White	51" L., 11-3/4" W., 4-3/4" ht.	40w integrated LED, 3000K, 90CRI, 2908 delivered lumens.	






P7278-3030K9




P7279-3030K9

Wrap & Strip LED

Product No.	Finish	Size	Source	Input
P730000-030-30	White	23-11/16" L., 2-1/4" W., 2-3/8" ht.	21w integrated LED, 3000K, 90CRI, 1600 lumens.	120V  
P730001-030-30	White	47-1/4" W., 2-1/4" W., 2-3/8" ht.	36w LED, 3000, 90CRI, 90CRI, 3200 lumens.	
P730011-030-30	White	23-3/4" L., 6-3/16" W., 3" ht.	21w integrated LED, 3000K, 90CRI, 1700 lumens.	
P730012-030	White	47-3/8" L., 6-3/16" W., 3" ht.	36w integrated LED, 3000K, 90CRI, 3400 lumens.	



P730000-030-30

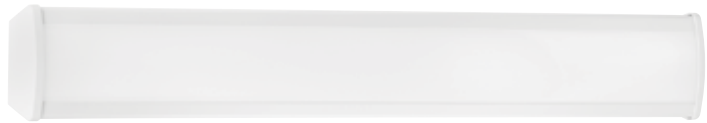

P730012-030





P730001-030-30



P730011-030-30

Surface Mount Linear LED

Thin geometric-styled metal end caps and acrylic shade offer a modern impact.

Product No.	Finish	Size	Source	Input
P7258-0930K9 P7258-17430K9	Brushed Nickel Urban Bronze	48-1/2" L., 11-13/16" W., 4-1/2" ht.	53w integrated LED, 3000K, 90CRI, 3559 delivered lumens.	120V  



P7258-0930K9





P7258-17430K9

Linear Undercabinet LED

HIDE a LITE™

The HIDE-A-LITE™ Linear undercabinet series provides the ideal solution for residential and light commercial applications. The luminaire is constructed from an aluminum housing and features a lens designed to optimize light distribution, ensuring for proper illumination of the work space below. The HIDE-A-LITE™ linear undercabinet utilizes a through hole mounting method to allow for an easy installation. The luminaire can be direct wired, removing the need for separate cords. Two armored cable fittings are included with the product for applications requiring the use of armored cable. An on/off switch is located on the front of the luminaire, allowing for easy access when used as a task light. The energy efficient LEDs can be dimmed down to 10% with many forward phase (TRIAC) and electronic low voltage (ELV) dimmers.

Product No.	Finish	Size	Source	Input
P700000-020-30 P700000-028-30	Antique Bronze White	9" L., 3-1/4" W., 1-1/8" ht.	One 4.5w integrated LED, 3000K, 90CRI, 300 delivered lumens.	120V  
P700001-020-30 P700001-028-30	Antique Bronze White	11-1/2" L., 3-1/4" W., 1-1/8" ht.	One 7.5w integrated LED, 3000K, 90CRI, 500 delivered lumens.	
P700002-020-30 P700002-028-30	Antique Bronze White	17-1/2" L., 3-1/4" W., 1-1/8" ht.	One 12.5w integrated LED, 3000K, 90CRI, 815 delivered lumens.	
P700003-020-30 P700003-028-30	Antique Bronze White	23-1/2" L., 3-1/4" W., 1-1/8" ht.	One 15.5w integrated LED, 3000K, 90CRI, 980 delivered lumens.	
P700004-020-30 P700004-028-30	Antique Bronze White	35-1/2" L., 3-1/4" W., 1-1/8" ht.	One 20w integrated LED, 3000K, 90CRI, 1500 delivered lumens.	



P700003-028-30



P700001-028-30



P700000-028-30



P700004-028-30



P700002-028-30



P700003-020-30



P700001-020-30



P700000-020-30



P700004-020-30



P700002-020-30

Tape Undercabinet System LED

HIDE a LITE™

LED Tape provides lighting to enhance aesthetics, while also aiding in tasks around the home. Common applications for LED Tape include; undercabinet lighting in kitchens to add illumination to work surfaces, highlighting back splashes in kitchens or bathroom areas and adding toe kick lighting at the bases of cabinets for dramatic and functional lighting.

LED Tape Lighting


Product No.	Size	Source
P700008-000-27	12" L., 3/8" W., 1/8" ht.	2700K
P700008-000-30	12" L., 3/8" W., 1/8" ht.	3000K
P700009-000-27	60" L., 3/8" W., 1/8" ht.	2700K
P700009-000-30	60" L., 3/8" W., 1/8" ht.	3000K
P700010-000-27	240" L., 3/8" W., 1/8" ht.	2700K
P700010-000-30	240" L., 3/8" W., 1/8" ht.	3000K

LED FEATURES

- Field cuttable at every 4" to end of run.
- cETLus listed damp location.
- 300 lumens per foot and consumes 4.2 watts per foot (71 lumens/w).
- 90CRI, 50,000 hr. life.
- 5 year warranty.

All fixtures:

JAB

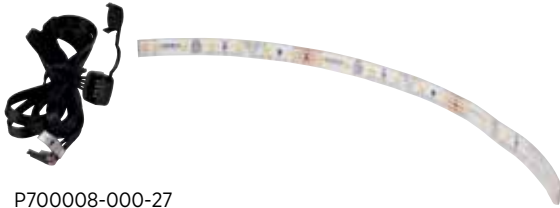

P700008-000-27



P700009-000-27
P700010-000-27

Transformer

Product No.	finish	Size	Source
P700020-031	Black	Max length of tape 60" 8-3/16" L., 2" W., 1-3/4" ht.	25W
P700021-031	Black	Max length of tape 120" 8-3/16" L., 2" W., 1-3/4" ht.	40W
P700023-031	Black	Max length of tape 240" 9-3/16" L., 3-3/8" W., 1-15/16" ht.	80W

PRODUCT FEATURES

- Maximum operating temperature -20° C to +40° C.
- Enclosure provided.
- Wire nuts and additional hardware included.



P700020-000
P700021-000
P700023-000



Additional System Connectors

Product No.	Finish	Size	Notes
P700011-000	Black	2" L., 5/8" W., 1/4" ht.	Connect tape sections (P700008, P700009, P700010)
P700012-000	Black	12" L., 5/8" W., 1/4" ht.	
P700013-000	Black	18" L., 5/8" W., 1/4" ht.	
P700014-000	Black	36" L., 5/8" W., 1/4" ht.	
P700015-000	Black	72" L., 5/8" W., 1/4" ht.	
P700016-000	Black	2-1/16" L., 2-1/16" W., 1/6" ht.	90° connector for connecting sections of tape (P700008, P700009, P700010) on corners.
P700017-000	Black	3-3/16" L., 3-3/16" W., 1/4" ht.	Three-way Y connector for connecting sections of tape (P700008, P700009, P700010)
P700022-000	Black	60" L., 5/8" W., 1/4" ht.	N/A



P700011-000



P700013-000



P700015-000



P700017-000



P700012-000



P700014-000



P700016-000



P700022-000

Mounting Clips/ Additional Accesories

Product No.	Size	Notes
P700018-000	1-1/8" L., 1/4" W., 1/8" ht.	Pack of 10 clips/screws for straight runs for added support (2 clips per foot recommended)
P700019-000	1/2" L., 1/2" W., 1/4" ht.	End caps to terminate run of LED tape. For use when tape has been cut at end of run. Sold in sets of 10.
P7024-31	1" L., 2" W., 5/8" ht.	N/A



P700018-000



P700019-000





P7024-31

Edgelit Recessed LED

The LED edgelit recessed downlight combines a slim, low profile design with innovative technology, aesthetics, functionality and affordability. A separate recessed housing or junction box is not required for installation. The wet location listing allows for the product to be used in many applications, including showers. The low profile downlight is ideal for many residential, multi-family, commercial and hospitality applications. The detachable driver box can be removed from the fixture and mounted remotely when installing into shallow ceiling applications. The energy efficient design provides up to a 75% energy savings and up to 50,000 hours of LED life. The edgelit recessed luminaire can be dimmed down to 10%, flicker free, and is compatible with many forward phase (TRIAC) and electronic low voltage (ELV) dimmers.

TRIM FEATURES

- Features a detachable driver box, which can be mounted remotely for shallow ceiling installations.
- White polycarbonate lens controls direct glare from LEDs.
- No housing or J-box required for installation.
- Wet location listed.
- 120V input voltage.
- Dimmable to 10% with many Triac or ELV dimmers.
- IC rated and Air-Tight.
- Energy efficient design provides up to a 75% energy savings and up to 54,000 hours of LED life.
- Energy Star and Title 24 JA8-2016 listed.


Product No.	Finish	Size	Source	Input
P800004-028-30	White	5" W., 3" ht.	9.5w integrated LED, 3000K, 90CRI, 550 lumens.	120V  
P800005-028-30	White	7" W., 3" ht.	13w integrated LED, 3000K, 90CRI, 800 lumens.	




P800004-028-30



P800005-028-30

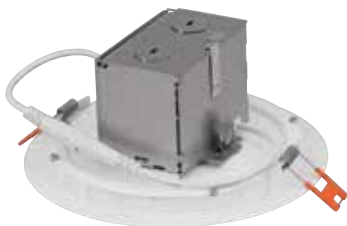

P800005-028-30
back view shown with
junction box attached



P800004-028-30
back view shown with
junction box attached

4" Recessed LED

LED Housings

For complete fixture, order housing with trim.



New Construction Non-IC with LED Quick Connect

P830-LED

Ceiling opening: 4-1/2"
Plaster frame: 7-7/8" x 10-3/4"
Recessed depth: 5-1/2"
Pryouts: 1/2" and 3/4"

P830-LED HOUSING FEATURES

- Integral quick link connector mates with P8080 and P8046 series LED trims.



New Construction Air-Tight IC with LED Quick Connect

P831-LED

Ceiling opening: 4-1/2"
Plaster frame: 8-3/8" x 13"
Recessed depth: 7-1/2"

P831-LED HOUSING FEATURES

- Integral quick link connector mates with P8080 and P8046 series LED trims.



Remodel Non-IC with LED Quick Connect

P832-LED


Ceiling opening: 4-1/4"
Recessed depth: 5-1/2"
Pryouts: 1/2"

P832-LED HOUSING FEATURES

- Retrofit version of P830-LED for use in existing ceilings.

4" LED Round Trim

Flicker free dimming down to 10% with many Triac or forward phase dimmers. Flicker rate less than 30%.

Product No.	Finish	Source	Input
P8080-28-30K	White	9.5w integrated LED, 3000K, 90CRI, 630 lumens.	120V 




P8080-28-30K

P8080 & P8046 TRIM FEATURES

- The trim is equipped with both Edison base adapter and quick link connector allowing easy installation in many standard medium based socket recessed housings and Progress LED recessed housings.
- A polycarbonate diffused lens reduces glare and pixilation from LEDs.
- Trim uses friction springs for easy installation into recessed housings.
- cCSAus Listed for Wet Locations, Energy Star.
- Flicker free dimming down to 10% with many Triac or ELV dimmers.
- Suitable for use in IC and Non IC applications.
- LEDs are 3000K, CRI 90+ and rated for 50,000 hours.

4" LED Eyeball Trim

Flicker free dimming down to 10% with many Triac or forward phase dimmers. Flicker rate less than 30%.

Product No.	Finish	Source	Input
P8046-28-30K	White	9.5w integrated LED, 3000K, 90CRI, 630 lumens.	120V 



5" Recessed LED

LED Housings

For complete fixture, order housing with trim.



New Construction Air-Tight IC with LED Quick Connect

P84-LED

Ceiling opening: 5-1/4"
Plaster frame: 7-7/8" x 10-3/4"
Recessed depth: 5-1/2"
Pryouts: 1/2" and 3/4"

P84-LED HOUSING FEATURES

- Integral quick connectors mate with P8061 and P8176 series.



Remodel Air-Tight IC with LED Quick Connect

P1841-LED


Ceiling opening: 5-1/2"
Recessed depth: 5-3/8"
Pryouts: 1/2"

P1841-LED HOUSING FEATURES

- Rated for direct contact with insulated ceiling.
- Adjustable housing to accommodate ceiling thickness 1/2" to 1-1/2" .
- Meets ASTM-E283 air flow requirements.

5" LED Round Trim

Flicker free dimming down to 10% with many Triac or forward phase dimmers. Flicker rate less than 30%.

Product No.	Finish	Source	Input
P8061-28-30K	White	10.5w integrated LED, 3000K, 90CRI, 700 lumens.	120V 




P8061-28-30K

P8061 & P8176 TRIM FEATURES

- Frosted polycarbonate lens controls direct glare from LEDs.
- cULus listed for wet locations.
- Lumen output and distribution comparable to 65w BR30 incandescent lamp.
- CRI is 90+ rivaling CFL.
- Suitable for use in IC or NON-IC applications.
- 50,000 hours life based on 70% lumen maintenance (TM-21).

5" LED Eyeball Trim

Flicker free dimming down to 10% with many Triac or forward phase dimmers. Flicker rate less than 30%.

Product No.	Finish	Source	Input
P8176-28-30K	White	10.5w integrated LED, 3000K, 90CRI, 670 lumens.	120V 



P8176-28-30K

5" Recessed

Shallow Remodel Housing

For complete fixture, order housing with trim.



Remodel Air-Tight IC
with E26 Socket

P1841-ICAT

Ceiling opening: 5-1/2"
Recessed depth: 5-3/8"
Pryouts: 1/2"

P1841-ICAT HOUSING FEATURES

- Rated for direct contact with insulated ceiling.
- Meets ASTM-E283 air flow requirements.
- Adjustable housing to accommodate ceiling thickness 1/2" to 1-1/2".
- Use with compatible items only.



IC Trim

6-1/2" outside diameter. Can also be used with P851-ICAT.



SHALLOW STEP BAFFLE

P8475-28 Satin White
Damp location listed.
Lamp: PAR30/R30, 50w max.
Compatible with **P851-ICAT** and **P1841-ICAT**.



SHOWER TRIM

P867WL-28 White
Wet location listed
when used with an
outdoor rated PAR30
lamp. 50w PAR30*
**WL trims require use with
outdoor rated PAR lamps*



EYEBALL

P876-28 White
75w PAR30

LED IC Trims

All fixtures:



LED ROUND

P8061-28-30K White
10.5w integrated LED, 3000K,
90CRI, 700 lumens.



LED EYEBALL

P8176-28-30K White
10.5w integrated LED, 3000K,
90CRI, 670 lumens.

6" Recessed LED

LED Housing New Construction

For complete fixture, order housing with trim.



New Construction Air-Tight IC & Non-IC with LED Quick Connect

P87-LED


Ceiling opening: 6-7/8" dia.
Plaster frame: 7-7/8" x 10-3/4"
Recessed depth: 7-1/2"
Pryouts: 1/2" & 3/4"

P87-LED HOUSING FEATURES

- Integral quick connect mates with P8071 and P8076 series LED trims.

6" LED Trim 1000 Lumens

Flicker free dimming down to 10% with many Triac or forward phase dimmers. Flicker rate less than 30%.

Product No.	Finish	Source	Input
P8071-28/30K-L10-STR2-30K	White	12w integrated LED, 3000K, 80 CRI, 1000 lumens	120V 




P8071-28/30K-L10-STR2



Includes Edison base socket and Quick-Link connector

6" LED Round Trim

Flicker free dimming with Triac or forward phase dimmers. Flicker rate less than 30%.

Product No.	Finish	Source	Input
P8071-28-30K	White	10.5w integrated LED, 3000K, 90CRI, 725 lumens.	120V 





P8071-28-30K

Everlume™ Round Surface Mount LED

Edgelit technology creates a large glare free and evenly illuminated surface for a variety of applications for both residential and commercial applications. Offering a low profile design, LED Everlume™ Round Surface Mount is available in a White finish. The integrated driver does not recess into junction box, allowing for easy installation into 4" octagonal, 4" round PVC and 4-1/2" ceiling pan junction boxes. Wet location listed and offers a 50,000-hour LED life.

LED FEATURES

- Wet location listed.
- Flicker-free dimming with many Triac and ELV dimmers.
- 120v input voltage.
- 50,000 hour life.

Product No.	Finish	Size	Source	Input
P810024-030-30	White	7" dia., 1-1/8" ht.	15w integrated LED 3000K, 90CRI, 1000 lumens.	120V  
P810015-030-30		11" dia., 1-1/8" ht.	17w integrated LED 3000K, 90CRI, 1300 lumens.	
P810016-030-30		14" dia., 1-1/8" ht.	19.5w integrated LED 3000K, 90CRI, 1700 lumens.	
P810017-030-30		18" dia., 1-1/8" ht.	23w integrated LED 3000K, 90CRI, 2100 lumens.	
P810018-030-30		5" dia., 1-1/8" ht.	12w integrated LED 3000K, 90CRI, 800 lumens.	

EVERLUME™
LED LIGHTING



P810017-030-30



P810015-030-30



P810024-030-30



P810018-030-30



P810016-030-30

Everlume™ Round Trim Accessories

You'll never have to sacrifice function for style with our Everlume™ Round Trim Accessories. This collection offers a variety of finishes and trim ring sizes to best fit your unique design needs. Each trim ring is easy to install in both residential and commercial settings.

Product No.	Finish	Size
P860048-009 P860048-020 P860048-031	Brushed Nickel Antique Bronze Black	5" dia., 1-1/8" ht.
P860049-009 P860049-020 P860049-031	Brushed Nickel Antique Bronze Black	7" dia., 1-1/8" ht.
P860050-009 P860050-020 P860050-031	Brushed Nickel Antique Bronze Black	11" dia., 1-1/8" ht.
P860050-009 P860050-020 P860050-031	Brushed Nickel Antique Bronze Black	14" dia., 1-1/8" ht.
P860050-009 P860050-020 P860050-031	Brushed Nickel Antique Bronze Black	18" dia., 1-1/8" ht.



P860048-009



P860049-009



P860048-020



P860048-031



P860049-020



P860049-031



P860050-009



P860050-020



P860050-031



P860051-009



P860051-020



P860051-031



P860052-009





P860052-020



P860052-031

Round Surface Mount LED



Product No.	Finish	Size	Source	Input
P8222-28-30K	White	7-1/4" dia., 1-1/4" ht.	17w integrated LED, 3000K, 90CRI 1170 lumens	120V  



P8222-28-30K
Triac/ELV dimming

Emblem Surface Mount LED

Easy installation and a sleek, modern lighting aesthetic are offered by our Emblem Surface Mount LED Collection. An excellent choice for general ambient lighting, each polished design features a smooth, slightly tapered trim ring surrounding a single, integrated LED light source. Enjoy the unmatched level of glare control offered by the fixture's diffused polycarbonate lens that also hides any unwanted LED pixelation. Each light fixture is home to an integrated AC LED light engine that seamlessly installs to a variety of ceiling pan junction boxes to give you added flexibility when it comes to creating your design vision. The surface mount provides unparalleled longevity with its, 50,000-hour LED life span and 80% energy savings.

Product No.	Finish	Size	Source	Input
P810027-020-30 P810027-028-30	Bronze White	5-1/2" dia., 1-7/8" ht.	12.5w integrated LED, 3000K, 90CRI, 750 lumens.	120V  
P810014-020-30 P810014-028-30	Bronze White	7-1/4" dia., 1-3/8" ht.	15.5w integrated LED, 3000K, 90CRI, 1080 lumens.	

LED FEATURES

- Wet location listed.
- 120v input voltage.
- 60 Lumens per watt.
- Flicker-free dimming with many Triac and ELV dimmers.
- 50,000 hour life.



P810027-020-30



P810027-028-30





P810014-020-30K



P810014-028-30

Intrinsic Surface Mount LED

Elevate your design vision with just the flip of a switch with our Intrinsic Surface Mount LED Collection. The simple, classic design of these light fixtures can easily be installed into a variety of style applications in both residential and commercial settings. We offer two different sizes of surface mounts, both coated in a crisp white finish, to meet your unique design needs. Each smooth trim ring surrounds an integrated LED light fixture ready to emit general ambient lighting wherever it calls home in your design plan.

Product No.	Finish	Size	Source	Input
P810012-028-30	White	5-1/2" dia., 1" ht.	12w integrated LED, 3000K, 90CRI, 600 lumens.	120V  
P810013-028-30	White	7-1/2" dia., 1-3/16" ht.	15.5w integrated LED, 3000K, 90CRI, 1000 lumens.	

LED FEATURES

- Wet location listed.
- 120v input voltage.
- 60 Lumens per watt.
- Flicker-free dimming with many Triac and ELV dimmers.
- 50,000 hour life.



P810012-028-30



P810013-028-30K

Decorative Surface Mount LED

Flicker free dimming down to 10% with many Triac or forward phase dimmers. Flicker rate less than 30%.

Product No.	Finish	Size	Source	Input
P8247-09-30K	Brushed Nickel Antique Bronze White Black	5-1/2" dia., 1-1/2" ht.	90CRI, 690 lumens, 66 lumens per watt	120V  
P8147-09-30K	Brushed Nickel	7-1/4" dia., 2-3/4" ht.	10.5w integrated LED, 3000K, 90CRI, 690 lumens, 66 lumens per watt.	



P8247-09-30K
Triac/ELV dimming



P8147-09-30K
Triac/ELV dimming

Retrofit Recessed Accessories

The P8147 and P8247 surface mounts require an accessory mounting option for recessed housings.

Product No.	Description
P8595-01	Recessed mounting accessory for P8147 and P8222 series. Allows for installation in 6" housings. Edison base adapter included.



P8595-01

Indoor Steplights LED

The mini-steplights are ideal for indoor residential applications. Energy efficient steplights include both vertical and horizontal louvers and are available in four finishes.

Product No.	Finish	Size	Source
P660003-009-30K	Brushed Nickel	2-3/4" W., 4-1/2" ht.	1w LED, 3000K, 90CRI, 12 lumens.
P660003-020-30K	Antique Bronze		
P660003-028-30K	White		
P660003-031-30K	Black		



P660003-009-30K



P660003-020-30K



P660003-028-30K



P660003-031-30K



DFS Series DECORATIVE FABRIC SHADES

Introducing a new family of ceiling, cable pendant, and wall mount decorative fabric/acrylic diffusers. The DFS Series combines modern aesthetics and quality performance by offering endless choices of size, shape and material finish. With the possibility for custom sizes and finishes, this offering is sure to meet every design need. Ideal for hospitality, multi-family, commercial, and residential applications.



COMMERCIAL

DFS Series

Simple to order. Specify shape, shade finish, cross-grid, and canopy options.

Pendant Shapes



Round



Square



Double Layer

Cross Grid



Cross Grid Finishes:
Black, Bronze,
Natural Oak,
Nickel, White.



Inner Step



Dome-In-Shade



Tapered

Canopy Options



White



Nickel

Sconce Shapes



Half Cylinder



Hour Glass



Concave




Vertical Sweep



Double Square

Pendant and Sconce Shade Finishes



Acrylic White



Black Linen



Beige Linen



Grey Linen




White Linen

DFS Series

The DFS Series is a family offering of ceiling, cable pendant, and wall mount decorative fabric/acrylic diffusers. The DFS Series combines modern aesthetics and quality performance by offering endless choices of size, shape and material finish. With the possibility for custom sizes and finishes. Ideal for hospitality, multi-family, commercial, and residential applications.

Surface/Pendant Shade - Square Drum

Series	Mounting	Shape	Size	Shade Finish	Wattage	Voltage	CRI / CCT	Canopy Finish
PCDFS	SM Surface Mount	SQ Square Drum	12 12"	WTL White Linen	17 17W	120V 120V/60Hz	930 90CRI/ 3000K	Blank (surface) WT White BN Nickel 
	CM Cable Mount		15 15"	BGL Beige Linen	25 25W			
			19 19"	BKL Black Linen GYL Gray Linen LWT Laminated White Linen LBG Laminated Beige Linen FAW Full Acrylic White	32 32W			



PCDFS-CM-SQ-12-WTL
shown with canopy



PCDFS-SM-SQ-12-WTL



PCDFS-SM-SQ-12-BKL



PCDFS-SM-SQ-15-WTL



PCDFS-SM-SQ-15-GYL



PCDFS-SM-SQ-19-WTL



PCDFS-SM-SQ-15-GYL

Surface/Pendant Shade - Round Drum

Series	Mounting	Shape	Size	Shade Finish	Wattage	Voltage	CRI / CCT	Canopy Finish	Grid Options
PCDFS	SM Surface Mount CM Cable Mount	RD Round Drum	12 12" 15 15" 19 19"	WTL White Linen	17 17W 25 25W 32 32W	120V 120V/60Hz	930 90CRI/ 3000K	Blank (surface) WT White BN Nickel	GBL Trim Black
				BGL Beige Linen					GBZ Trim Bronze
				BKL Black Linen					GNI Trim Nickel
				GYL Gray Linen					GOF Trim Oak
				LWT Laminated White Linen					GWT Trim White
				LBG Laminated Beige Linen					
				FAW Full Acrylic White					
				FAWNT Acrylic White w/ top & bottom nickel trim					



PCDFS-CM-RD-12-WTL
shown with canopy



PCDFS-SM-RD-12-WTL



PCDFS-SM-RD-15-WTL



PCDFS-SM-RD-19-WTL



PCDFS-SM-RD-15-FAW



PCDFS-SM-RD-15-GYL-BNC



PCDFS-SM-RD-15-BGL



PCDFS-SM-RD-15-BGL



PCDFS-SM-RD-12-WTL-GOF



PCDFS-SM-RD-12-WTL-GNI



PCDFS-SM-RD-12-WTL-GWT




PCDFS-SM-RD-12-WTL-GBL



PCDFS-SM-RD-12-WTL-GBZ

DFS Series

Surface/Pendant Shade - Double Layer

Series	Mounting	Shape	Size	Shade Finish	Wattage	Voltage	CRI / CCT	Canopy Finish
PCDFS	SM Surface Mount CM Cable Mount	DL Double Layer	16 16" 18 18" 23 -23"	WTL White Linen	17 17W 25 25W 32 32W	120V 120V/60Hz	930 90CRI/ 3000K	Blank (surface) WT White BN Nickel 
				BGL Beige Linen				
				BKL Black Linen				
				GYL Gray Linen				
				LWT Laminated White Linen				
				LBG Laminated Beige Linen				
FAW Full Acrylic White								



PCDFS-CM-DL-16-FAW
shown with canopy



PCDFS-SM-DL-16-FAW




PCDFS-SM-DL-18-FAW



PCDFS-SM-DL-23-WTL

Surface/Pendant Shade - Inner Step

Series	Mounting	Shape	Size	Shade Finish	Wattage	Voltage	CRI / CCT	Canopy Finish
PCDFS	SM Surface Mount CM Cable Mount	IS Inner Step	12 12" 15 15" 19 19"	WTL White Linen	17 17W 25 25W 32 32W	120V 120V/60Hz	930 90CRI/ 3000K	Blank (surface) WT White BN Nickel 
				BGL Beige Linen				
				BKL Black Linen				
				GYL Gray Linen				
				LWT Laminated White Linen				
				LBG Laminated Beige Linen				
FAW Full Acrylic White								



PCDFS-CM-IS-12-WTL
shown with canopy



PCDFS-SM-IS-12-WTL



PCDFS-SM-IS-15-WTL



PCDFS-SM-IS-15-FAW



PCDFS-SM-IS-15-GYL



PCDFS-SM-IS-15-BGL




PCDFS-SM-IS-15-BKL



PCDFS-SM-IS-19-WTL

Surface/Pendant Shade - Dome-in-Shade

Series	Mounting	Shape	Size	Shade Finish	Wattage	Voltage	CRI / CCT	Canopy Finish
PCDFS	SM Surface Mount CM Cable Mount	DS Dome-in-Shade	14 14"	WTL White Linen	17 17W 25 25W 32 32W	120V 120V/60Hz	930 90CRI/ 3000K	Blank (surface) WT White BN Nickel 
			16 16"	BGL Beige Linen				
			20 20"	BKL Black Linen				
				GYL Gray Linen				
				LWT Laminated White Linen				
				LBG Laminated Beige Linen				
	FAW Full Acrylic White							



PCDFS-CM-DS-16-GYL
shown with canopy



PCDFS-SM-DS-16-GYL




PCDFS-SM-DS-16-WTL



PCDFS-SM-DS-20-WTL

Surface/Pendant Shade - Tapered Shade

Series	Mounting	Shape	Size	Shade Finish	Wattage	Voltage	CRI / CCT	Canopy Finish
PCDFS	CM Cable Mount	TS Tapered Shade	20 12" x 20"	WTL White Linen	17 17W 25 25W	120V 120V/60Hz	930 90CRI/ 3000K	WT White BN Nickel 
			tapered	BGL Beige Linen				
			24 15" x 24"	BKL Black Linen				
			tapered	GYL Gray Linen				
				LWT Laminated White Linen				
				LBG Laminated Beige Linen				



PCDFS-CM-TS-BGL




PCDFS-CM-TS-GYL



PCDFS-CM-TS-WTL

DFS Series

Surface/Pendant Shade - Half Cylinder

Series	Mounting	Shape	Shade Finish	Wattage	Voltage	CRI / CCT
PCDFW	WM Wall Mount	HCS Half Cylinder Small HCL Half Cylinder Large	WTL White Linen BGL Beige Linen BKL Black Linen GYL Gray Linen LWT Laminated White Linen LBG Laminated Beige Linen FAW Full Acrylic White FAWNT Acrylic White w/ top & bottom nickel trim	17 17W	120V 120V/60Hz	930 90CRI/ 3000K 



PCDFW-WM-HCS-BGL



PCDFW-WM-HCL-GYL



PCDFW-WM-HCL-WTL



PCDFW-WM-HCL-BGI




PCDFW-WM-HCS-BGL-FAW



PCDFW-WM-HCS-WTL

Surface/Pendant Shade - Hourglass

Series	Mounting	Shape	Shade Finish	Wattage	Voltage	CRI / CCT
PCDFW	WM Wall Mount	HG Hourglass	WTL White Linen BGL Beige Linen BKL Black Linen GYL Gray Linen LWT Laminated White Linen LBG Laminated Beige Linen	17 17W	120V 120V/60Hz	930 90CRI/ 3000K 



PCDFW-WM-HG-BGL




PCDFW-WM-HG-WTL



PCDFW-WM-HG-WTL
Horizontal

Surface/Pendant Shade - Concave

Series	Mounting	Shape	Shade Finish	Wattage	Voltage	CRI / CCT
PCDFW	WM Wall Mount	CC Concave	WTL White Linen BGL Beige Linen BKL Black Linen GYL Gray Linen LWT Laminated White Linen LBG Laminated Beige Linen	17 17W	120V 120V/60Hz	930 90CRI/ 3000K 



PCDFW-WM-CC-WTL

Surface/Pendant Shade - Vertical Sweep

Series	Mounting	Shape	Shade Finish	Wattage	Voltage	CRI / CCT
PCDFW	WM Wall Mount	VS Vertical Sweep	WTL White Linen BGL Beige Linen BKL Black Linen GYL Gray Linen LWT Laminated White Linen LBG Laminated Beige Linen	17 17W	120V 120V/60Hz	930 90CRI/ 3000K 



PCDFW-WM-VS-GYL



PCDFW-WM-VS-WTL

Surface/Pendant Shade - Double Square


Series	Mounting	Shape	Trim Finish	Wattage	Voltage	CRI / CCT
PCDFW	WM Wall Mount	DSS Double Square	NI - Nickel BZ - Bronze	17 17W	120V 120V/60Hz	930 90CRI/ 3000K 



PCDFW-WM-DS-WTL

Weaver LED

The Weaver collection combines linen drum shades with a Linen glass diffuser to offer a warm feel ideal for residential applications, including kitchens and laundry rooms, as well as light commercial environments. ELV dimming

Product No.	Finish	Size	Source	Input
P3610-0930K9 P3610-2030K9	Brushed Nickel Antique Bronze	10" dia., 3-1/2" ht.	One 17w LED module, 3000K, 90CRI, 1211 source lumens/module	120V 
P3611-0930K9 P3611-2030K9	Brushed Nickel Antique Bronze	16" dia., 4" ht.	Two 17w LED modules, 3000K, 90CRI, 1211 source lumens/module	
P3612-0930K9 P3612-2030K9	Brushed Nickel Antique Bronze	22" dia., 4-1/2" ht.	Three 17w LED modules, 3000K, 90CRI, 1211 source lumens/module	



P3612-0930K9



P3611-0930K9



P3610-0930K9



P3612-2030K9




P3611-2030K9



P3610-2030K9

Beyond LED

The Beyond collection offers a variety of distinctive, modern designs with updated casual flair. Available in round or square styles, the assortment features options with textures glass, metal overlays, or geometric acrylic diffusers. ELV dimming.

Product No.	Finish	Size	Source	Input
P2308-0930K9	Brushed Nickel	12" dia., 2-3/4" ht.	One 17w LED module, 3000K, 90CRI, 1211 lumens	120V 



P2308-0930K9

Surface Mount LED

White acrylic diffuser for kitchen, bath, laundry, workshop or family area.
All Triac or ELV dimming except P7251 - Triac (120) 0-10V dimming.

Product No.	Finish	Size	Source	Input
P7249-0930K9 P7249-17430K9	Brushed Nickel Urban Bronze	10-3/8" dia., 3-1/2" ht.	21.7W integrated LED, 3000K, 90CRI, 1027 lumens	120V
P7250-0930K9 P7250-17430K9	Brushed Nickel Urban Bronze	17-3/4" dia., 4-3/4" ht.	30W integrated LED, 3000K, 90CRI, 1765 lumens	120V
P7251-0930K9 P7251-17430K9	Brushed Nickel Urban Bronze	32-1/2" L., 18" W., 4-3/4" ht.	39W integrated LED, 3000K, 90CRI, 2649 lumens	120- 277V
P7253-0930K9 P7253-17430K9	Brushed Nickel Urban Bronze	14" dia., 3-3/4" ht.	22W integrated LED, 3000K, 90CRI, 1184 lumens	120V



P7249-0930K9



P7253-0930K9



P7250-0930K9



P7249-17430K9



P7250-17430K9



P7251-17430K9

Mingle LED

Decorative metal frame that highlights concentric circular shapes. Brushed Nickel has etched parchment glass diffuser. Antique Bronze has natural parchment and glass. ELV dimming.

Product No.	Finish	Size	Source	Input
P2318-0930K9	Brushed Nickel	11" dia., 5-7/8" ht.	One 17w LED module, 3000K, 90CRI, 1211 lumens	120V
P2320-0930K9	Brushed Nickel	14" dia., 10-1/2" ht.		





P2318-0930K9




P2320-0930K9

Helm LED

Square acrylic diffuser on an architectural square frame. Ceiling or wall mount. ELV Dimming.

Product No.	Finish	Size	Source	Input
P3447-0930K9 P3447-2030K9	Brushed Nickel Antique Bronze	11" sq., 3-3/4" ht.	One 17w LED module, 3000K, 90CRI, 1211 source lumens/module	120V  
P3448-0930K9 P3448-2030K9	Brushed Nickel Antique Bronze	14" sq., 3-3/4" ht.	Two 17w LED modules, 3000K, 90CRI, 1211 source lumens/module	
P3449-0930K9 P3449-2030K9	Brushed Nickel Antique Bronze	18" sq., 3-3/4" ht.	Three 17w LED modules, 3000K, 90CRI, 1211 source lumens/module	



P3447-0930K9



P3447-2030K9



P3448-0930K9



P3449-2030K9





P3449-0930K9



P3448-2030K9

Fresnel LED

Industrial styling with a nautical-inspired Fresnel glass lens offers both form and function. ELV dimming.

Product No.	Finish	Size	Source	Input
P350113-009-30 P350113-015-30	Brushed Nickel Polished Chrome	12-3/4" dia., 4-1/2" ht.	One 17w LED module, 3000K, 90CRI, 1276 source lumens.	120V  





P350113-009-30



P350113-015-30

Bezel LED

Sleek and slim in appearance with etched white glass shade offering a pleasant glow from the bottom and sides.

Product No.	Finish	Size	Source	Input
P350085-009-30 P350085-015-30	Brushed Nickel Polished Chrome	10-1/2" dia., 3-1/2" ht.	One 17w LED module, 3000K, 90CRI, 1276 source lumens.	120V  
P350086-009-30 P350086-015-30	Brushed Nickel Polished Chrome	13" dia., 3-7/8" ht.	One 25w LED module, 3000K, 90CRI, 1770 source lumens.	
P350087-009-30 P350087-015-30	Brushed Nickel Polished Chrome	16" dia., 4-3/4" ht.	One 26w LED module, 3000K, 90CRI, 1770 source lumens.	



P350085-015-30



P350086-015-30



P350087-015-30



P350085-009-30



P350086-009-30





P350087-009-30

Apogee LED

Flushmount and semi-flush fixtures with etched white glass and universal input. Designed and ideal for residential and commercial applications, Apogee features a clean profile and a generous scale. The simple and elegant frame is finished in Architectural Bronze or Brushed Nickel. 0-10V dimming.

LED Flush

Product No.	Finish	Size	Source	Input
P350070-009-30	Brushed Nickel	15" dia., 3-11/16" ht.	30w integrated LED, 3000K, 90CRI, 1660 lumens	120 - 277V  
P350071-009-30	Brushed Nickel	21" dia., 4-1/2" ht.	45w integrated LED, 3000K, 90CRI, 2550 lumens	





P350070-009-30



P350071-009-30

Inspire LED

Traditional forms are freshened with flowing lines and LED lamping.

Product No.	Finish	Size	Source	Input
P350134-009-30 P350134-143-30	Brushed Nickel Antique Bronze	13" dia., 10-5/8" ht.	One 17w LED module, 3000K, 90CRI, 1452 source lumens.	120V  
P350135-009-30 P350135-143-30	Brushed Nickel Antique Bronze	13" dia., 6" ht.	One 17w LED module, 3000K, 90CRI, 1452 source lumens.	



P350135-143-30



P350134-143-30



P350135-009-30




P350134-009-30

Dome LED

A domed, linen finish glass diffuser is discreetly supported from metal fittings and encloses an energy-efficient light source.

NOTE: This fixture is not dimmable.

Product No.	Finish	Size	Source	Input
P350055-009-30	Brushed Nickel	12" dia., 4-1/4" ht.	20w integrated LED, 3000K, 90CRI, 1000 lumens	120V 
P350056-009-30	Brushed Nickel	16" dia., 4-1/2" ht.	24w integrated LED, 3000K, 90CRI, 1144 lumens	




P350055-009-30



P350056-009-30

Portal LED

A series of flush mounts adorned with industrial-inspired accents and etched glass. ELV dimming.

Product No.	Finish	Size	Source	Input
P3631-0930K9 P3631-1530K9	Brushed Nickel Polished Chrome	9" dia., 2-1/2" ht.	One 17w LED module, 3000K, 90CRI, 1211 lumens	120V 
P3632-0930K9 P3632-1530K9	Brushed Nickel Polished Chrome	13" dia., 2-1/2" ht.	One 29w LED module, 3000K, 90CRI, 2197 lumens	
P3658-0930K9	Brushed Nickel	11" dia., 3-7/8" ht.	One 17w LED module, 3000K, 90CRI, 1211 lumens	



P3631-1530K9



P3631-0930K9



P3658-0930K9





P3632-1530K9



P3632-0930K9

Gather LED

Sleek frame features updated styling and elegant etched glass shades.

Product No.	Finish	Size	Source	Input
P350088-009-30 P350088-015-30	Brushed Nickel Polished Chrome	Hanging and ceiling mount hardware included. 12-7/8" dia., 10-3/8" ht.,	Overall ht. w/chain 50", wire 10'. One 17w LED module, 3000K, 90CRI, 1276 source lumens.	120V  





P350088-015-30
shown as hanging



P350088-009-30
shown as hanging

Flush Mounts LED

Etched glass dominates a traditional design with its distinctive and sculptural bowl paired with a metal frame.

Product No.	Finish	Size	Source	Input
P350131-009-30 P350131-015-30 P350131-020-30	Brushed Nickel Polished Chrome Antique Bronze	15-1/2" dia., 5-1/4" ht.	One 25w LED module, 3000K, 90CRI, 1770 source lumens.	120V  
P350100-009-30 P350100-015-30 P350100-020-30	Brushed Nickel Polished Chrome Antique Bronze	11" dia., 4-1/4" ht.	One 17w LED module, 3000K, 90CRI, 1276 source lumens.	
P350101-009-30 P350101-015-30 P350101-020-30	Brushed Nickel Polished Chrome Antique Bronze	13-1/2" dia., 4-1/2" ht.	One 25w LED module, 3000K, 90CRI, 1770 source lumens.	



P350100-009-30



P350100-015-30



P350100-020-30



P350101-009-30



P350101-015-30



P350101-020-30



P350131-009-30





P350131-015-30



P350131-020-30

Flush Mounts LED

Flush mount series featuring an etched glass bowl. Triac or ELV dimming.

Product No.	Finish	Size	Source	Input
P350051-009-30	Brushed Nickel	11" dia., 4-3/16" ht.	One 17w LED module, 3000K, 90CRI, 1452 lumens	120V  
P350052-009-30	Brushed Nickel	12-9/16" dia., 4-1/2" ht.	One 25w LED module, 3000K, 90CRI, 2015 lumens	
P350053-009-30	Brushed Nickel	11" dia., 4" ht.	One 17w LED module, 3000K, 90CRI, 1452 lumens	
P350054-009-30	Brushed Nickel	13-1/4" dia., 4-3/4" ht.	One 25w LED module, 3000K, 90CRI, 2015 lumens	



P350051-009-30



P350052-009-30





P350053-009-30



P350054-009-30

Square Alabaster Glass LED

Flush mount with swirl pattern or alabaster glass. Triac or ELV dimming.



Product No.	Finish	Size	Source	Input
"P350019-009-30	Brushed Nickel	9-1/2" sq., 4-3/8" ht.	One 17w LED module, 3000K, 90CRI, 1452 source lumens	 



P350019-009-30*

Cloud + Drum LED

Choose either a classic white round diffuser or cloud-like diffuser.

Product No.	Finish	Size	Source	Input
P730002-030-30	White	13-5/8" W., 4" ht.	22.5w integrated LED, 3000K, 90CRI, 2025 delivered lumens.	120V  
P730003-030-30	White	17" W., 4" ht.	28w integrated LED, 3000K, 90CRI, 2520 delivered lumens.	
P730005-030-30 P730005-031-30	White Black	11" W., 4" ht.	21w integrated LED, 3000K, 90CRI, 1680 delivered lumens.	
P730006-030-30	White	13-5/8" W., 4" ht.	22.5w integrated LED, 3000K, 90CRI, 1845 delivered lumens.	
P730007-030-30	White	17" W., 4" ht.	28w integrated LED, 3000K, 90CRI, 2548 delivered lumens.	
P730008-030-30	White	11" W., 4" ht.	21w integrated LED, 3000K, 90CRI, 1575 delivered lumens.	
P810025-030-30	White	11" dia., 3-1/2" ht.	15w integrated LED, 3000, 90CRI, 1152 delivered lumens.	
P810026-030-30	White	13-3/4" dia., 3-3/4" ht.	20w integrated LED, 3000, 90CRI, 1431 delivered lumens.	



P730003-030-30



P730002-030-30



P730005-030-30



P730005-031-30



P730007-030-30



P730006-030-30



P730008-030-30





P810026-030-30



P810026-030-30

Maier DC LED

Simplicity rules with a white opal acrylic diffuser held by double-banded metal trim.

Product No.	Finish	Size	Source	Input
P350076-009-30 P350076-020-30 P350076-030-30	Brushed Nickel Antique Bronze White	9-1/16" dia., 4-5/16" ht.	20.5w integrated LED, 3000K, 90CRI, 1354 delivered lumens.	120V  
P350077-009-30 P350077-020-30 P350077-030-30	Brushed Nickel Antique Bronze White	14" dia., 4-3/4" ht.	26w integrated LED, 3000K, 90CRI, 2016 delivered lumens.	
P350078-009-30 P350078-020-30 P350078-030-30	Brushed Nickel Antique Bronze White	18" dia., 5-1/4" ht.	28.5w integrated LED, 3000K, 90CRI, 2064 delivered lumens.	



P350076-020-30



P350076-030-30



P350076-009-30



P350077-020-30



P350077-030-30



P350077-009-30



P350078-020-30





P350078-030-30



P350078-009-30

Linen LED

White linen glass bowl trimmed with metal banding and punctuated with a metal knob.

Product No.	Finish	Size	Source	Input
P350005-009-30	Brushed Nickel	11" dia., 4-5/8" ht.	21w integrated LED, 3000K, 90CRI, 921 delivered lumens.	120V  
P350006-009-30	Brushed Nickel	13" dia., 5-3/8": ht.	21w integrated LED, 3000K, 90CRI, 1152 delivered lumens.	
P350007-009-30	Brushed Nickel	15" dia., 5-7/8" ht.	28w integrated LED, 3000K, 90CRI, 1389 delivered lumens.	
P350008-009-30	Brushed Nickel	19" dia., 7-1/8" ht.	30w integrated LED, 3000K, 90CRI, 1984 delivered lumens.	



P350005-009-30



P350006-009-30




P350007-009-30



P350008-009-30

6" Fitter LED

Opal glass diffuser. ELV dimming.

Product No.	Finish	Size	Source	Input
P3408-0930K9 P3408-3030K9	Brushed Nickel White	7-1/2" dia., 4-3/8" ht.	One 17w LED module, 3000K, 90CRI, 1211 source lumens	120V 
P3412-0930K9	Brushed Nickel	11-1/2" dia., 5-3/4" ht.	One 29w LED module, 3000K, 90CRI, 2197 source lumens	





P3408-0930K9



P3408-3030K9

Milford LED

Octagonal aluminum metal frame surrounds white etched glass.

Product No.	Finish	Size	Source	Input
P3665-3130K9	Black	8-5/8" dia., 4-1/8" ht.	One 17w LED module, 3000K, 90CRI, 1211 source lumens.	120V  
P3673-3130K9	Black	10-5/8" dia., 4-7/8" ht.		






P3665-3130K9



P3673-3130K9

Apogee LED

Tiered metal banded trim holds a half-circle etched glass shade. 0-10V dimming

Product No.	Finish	Size	Source	Input
P710036-009-30 P710036-129-30	Brushed Nickel Architectural Bronze	15" W., 7-1/2" ht. Extends or depth 3-11/16"	20w integrated, 3000K, 90CRI, 940 delivered lumens	120-277V   




P710036-009-30



P710036-129-30

Frame LED

Modern architectural styling frames an integrated LED source and circular etched opal glass. For increased design options, fixtures can be installed horizontally or vertically. ELV dimming.




Product No.	Finish	Size	Source	Input
P2781-0930K9	Brushed Nickel Architectural Bronze	4-3/4" W., 12" ht. Extends 3-1/2". H/CTR 2-3/8".	15w integrated LED, 3000K, 90CRI, 738 lumens	120V 



P2781-0930K9

Eclipse LED

Lunar-eclipse inspired halfcircle metal frame accented by satin white glass. 0-10V dimming

Product No.	Finish	Size	Source	Input
P710090-009-30 P710090-031-30	Brushed Nickel Black	15-1/2" W., 7-1/2" ht., wire 6". Extends 4". H/CTR 3".	One 17w LED module, 3000K, 90CRI, 1276 source lumens.	120-277V   






P710090-031-30



P710090-009-30

Inspire LED

Gently curving form is accented with a fabric shade.

Product No.	Finish	Size	Source	Input
P710071-030-30 P710071-159-30	Summer Linen Off White Linen	6-1/4" W., 9" ht., Extends 3-1/8".	One 9w LED module, 3000K, 90CRI, 624 source lumens.	120V   





P710071-030-30



P710071-159-30

Anson LED

ADA wall lantern with polycarbonate diffuser and stainless steel frame. Triac or ELV dimming



Product No.	Finish	Size	Source	Input
P560001-129-30	Architectural Bronze	10" Sq., 3" ht. Extends 3".	One 17w LED module, 3000K, 90CRI, 1211 lumens	120V  



P560001-129-30

LED Sconces

ADA sconces with white acrylic or glass* diffuser. ELV dimming.

Product No.	Finish	Size	Source	Input
P7083-0930K9	Brushed Nickel	8-7/8" W., 10-5/8" ht. Extends 4". H/CTR 5-3/8".	One 17w LED module, 3000K, 90CRI, 1211 source lumens	120V  
P7085-0930K9	Brushed Nickel	9-1/2" W., 10-5/8" ht. Extends 3-3/4". H/CTR 10-3/8".		
P7088-0930K9	Brushed Nickel	8" W., 10-5/8" ht. Extends 3-7/8". H/CTR 5-3/8".		
P7092-0930K9	Brushed Nickel	8" W., 10-3/4" ht. Extends 4". H/CTR 5-1/2".		
P7093-3030K9	White	11-1/4" W., 11-5/16" ht. Extends 3-1/2". H/CTR 5-5/8".		



P7083-0930K9



P7085-0930K9



P7088-0930K9



P7092-0930K9*



P7093-3030K9*
Shown with Brushed Nickel finial






P7093-3030K9*
Shown with Bronze finial



P7093-3030K9*
Shown with White finial

LED Sconces

An elegant white linen shade that is open on the top and bottom diffuses light efficiently. Ideal for vanity and hospitality applications. Triac or ELV dimming.

Product No.	Finish	Size	Source	Input
P710010-009-30 P710010-129-30	Brushed Nickel Architectural Bronze	6-3/4" W., 12" ht. Extends 4". H/CTR 6".	One 9w LED module, 3000K, 90CRI, 624 source lumens	120V   




P710010-009-30



P710010-129-30

Truss LED

A tubular design pairs with a geometric back plate and mesh accents to create Truss – a fixture that can be mounted horizontally or vertically. Circular etched opal glass. ELV dimming

Product No.	Finish	Size	Source	Input
P2834-0930K9 P2834-12930K9	Brushed Nickel Architectural Bronze	4-3/4" W., 13" ht. Extends 3-7/8". H/CTR 2-3/8".	32w integrated LED, 3000K, 90CRI, 737 delivered lumens	120V 
P2839-0930K9 P2839-12930K9	Brushed Nickel Architectural Bronze	22-1/2" W., 4-3/4" ht. Extends 3-7/8". H/CTR 2-3/8".	37w integrated LED, 3000K, 90CRI, 1222 delivered lumens	



P2834-12930K9



P2839-0930K9



P2834-0930K9
shown vertically





P2839-12930K9
shown vertically

Capelli LED

Inspired by the beauty of frozen ice forms, Capelli LED sconces feature intriguing glass layers resulting in a sophisticated form. The integrated LED technology runs across the length of the fixture, allowing the illumination to showcase the unique effects of the handmade work of art. The backplate and knob details are finished in Chrome.

All fixtures can be installed horizontally or vertically.

Product No.	Finish	Size	Source	Input
P300054-015-30	Polished Chrome	24" W., 4-3/4" ht. Extends 3-3/4". H/CTR 2-3/8".	36w integrated LED, 3000K, 90CRI, 2600 delivered lumens.	120V  
P300055-015-30	Polished Chrome	33" W., 4-3/4" ht. Extends 3-3/4". H/CTR 2-3/8".	53w integrated LED, 3000K, 90CRI, 3850 delivered lumens.	
P710062-015-30	Polished Chrome	4-3/4" W., 12" ht. Extends 3-3/4". H/CTR 2-3/8".	16w integrated LED, 3000K, 90CRI, 1125 delivered lumens.	



P710062-015-30





P300055-015-30



P300054-015-30

Miter LED

The Miter LED wall sconce highlights a beautiful layered effect to enhance a variety of interior areas. Each clear beveled glass panel is hand cut and positioned together, creating visual interest that extend to the corners. To complete the form, a backplate and linear accents frame the glass in a Brushed Nickel finish. An integrated LED source provides a variety of energy and cost savings benefits.

Product No.	Finish	Size	Source	Input
P300152-009-30	Brushed Nickel	24" W., 5" ht. Extends 3-7/8". H/CTR 2-1/2".	36w integrated LED, 3000K, 90CRI, 1975 delivered lumens.	120V  
P300153-009-30	Brushed Nickel	34-1/8" W., 5" ht. Extends 3-7/8". H/CTR 2-1/2".	53w integrated LED, 3000K, 90CRI, 2825 delivered lumens	
P7100161-009-30	Brushed Nickel	5" W., 12-1/4" ht. Extends 3-7/8". H/CTR 6-1/8".	16w integrated LED, 3000K, 90CRI, 825 delivered lumens	



P300153-009-30



P300152-009-30





P7100161-009-30

Concourse LED

Architectural details and a full size canopy are key elements in Concourse LED vanity fixtures. A dual tone reflector frames the canopy to provide a mirror like effect. Etched opal glass is paired with Brushed Nickel and polished stainless accents in this versatile cylindrical fixture.

All fixtures can be installed horizontally or vertically.

Product No.	Finish	Size	Source	Input
P300093-009-30	Brushed Nickel	24" W., 4-3/4" ht. Extends 3-1/2". H/CTR 2-3/8".	One 37w LED module, 3000K, 90CRI, 2191 delivered lumens.	120V  
P300094-009-30	Brushed Nickel	36" W., 4-3/4" ht. Extends 3-1/2". H/CTR 2-3/8".	One 53w LED module, 3000K, 90CRI, 2969 delivered lumens.	





P300093-009-30




P300094-009-30

Colonnade LED

Tubular etched glass shades pop against geometric backplate to create Colonnade, an LED bath collection. Available in one, two, three and four-light options. Modern style and continuous illumination are ideal for a variety of bath settings - including Mid-Century and Luxe.

Product No.	Finish	Size	Source	Input
P300185-009-30 P300185-015-30	Brushed Nickel Polished Chrome	4-3/4" W., 7-1/2" ht. Extends 3-7/8". H/CTR 3-7/8".	9.5w integrated LED, 3000K, 90CRI, 500 delivered lumens.	120V  
P300186-009-30 P300186-015-30	Brushed Nickel Polished Chrome	13-1/4" W., 7-1/2" ht. Extends 3-7/8". H/CTR 3-7/8".	19w integrated LED, 3000K, 90CRI, 1000 delivered lumens.	
P300187-009-30 P300187-015-30	Brushed Nickel Polished Chrome	22" W., 7-1/2" ht. Extends 3-7/8". H/CTR 3-7/8".	28.5w integrated LED, 3000K, 90CRI, 1500 delivered lumens.	
P300188-009-30 P300188-015-30	Brushed Nickel Polished Chrome	31-3/8" W., 7-1/2" ht. Extends 3-7/8". H/CTR 3-7/8".	38w integrated LED, 3000K, 90CRI, 2000 delivered lumens.	

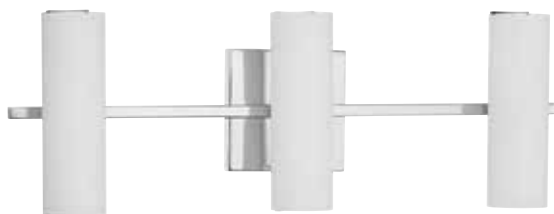

P300187-015-30



P300186-015-30



P300188-015-30



P300185-015-30



P300187-009-30



P300186-009-30




P300188-009-30



P300185-009-30

Beam LED

Beam LED vanity and sconces feature a squared, tubular opal glass diffuser paired with a simple, modern metal canopy. An integrated LED source provides a variety of energy and cost savings benefits. Suitable for residential and commercial applications.

Product No.	Finish	Size	Source	Input
P300182-129-30 P300182-009-30 P300182-015-30	Architectural Bronze Brushed Nickel Polished Chrome	Installs horizontal or vertical. 22-1/4" W., 4-3/4" ht. Extends 3". H/CTR 2-3/8".	36w integrated LED, 3000K, 90CRI, 2200 delivered lumens.	120V 
P710049-129-30 P710049-009-30 P710049-015-30	Architectural Bronze Brushed Nickel Polished Chrome	4-3/4" W., 10-1/2" ht. Extends 3-1/4". H/CTR 8-3/8".	16w integrated LED, 3000K, 90CRI, 1000 delivered lumens.	



P300182-129-30



P300182-009-30



P300182-015-30



P710049-015-30




P710049-129-30



P710049-009-30

Planck LED

Planck LED wall fixtures use indirect illumination to provide a dramatic architectural feature to any space. A brushed metal beam sports a sleek chrome accent to add visual interest to the minimalist form. Suitable for residential or commercial applications.

Product No.	Finish	Size	Source	Input
P710051-009-30	Brushed Nickel	4-3/4" W., 16" ht. Extends 3". H/CTR 12-5/8".	16w integrated LED, 3000K, 90CRI, 600 delivered lumens.	120V 
P710052-009-30	Brushed Nickel	24" W., 4-3/4" ht. Extends 3". H/CTR 2-3/8".	32w integrated LED, 3000K, 90CRI, 1100 delivered lumens	




P710052-009-30



P710051-009-30
Installs horizontal
or vertical

Frame LED

Modern architectural styling frames an integrated LED source and circular etched opal glass. For increased design options, fixtures can be installed horizontally or vertically. ELV Dimming.

Product No.	Finish	Size	Source	Input
P2781-0930K9	Brushed Nickel	4-3/4" W., 12" ht. Extends 3-1/2". H/CTR 2-3/8".	15w integrated LED, 3000K, 90CRI, 738 delivered lumens	120V 
P2782-0930K9	Brushed Nickel	24" W., 4-3/4" ht. Extends 3-1/2". H/CTR 2-3/8".	35w integrated LED, 3000K, 90CRI, 1659 delivered lumens	




P2781-0930K9



P2782-0930K9

Truss

A tubular design pairs with a geometric back plate and mesh accents to create Truss – a fixture than can be mounted horizontally or vertically. Circular etched opal glass. ELV Dimming

Product No.	Finish	Size	Source	Input
P2834-0930K9 P2834-12930K9	Brushed Nickel Architectural Bronze	4-3/4" W., 13" ht. Extends 3-7/8". H/CTR 2-3/8".	32w integrated LED, 3000K, 90CRI, 737 delivered lumens	120V 
P2839-0930K9 P2839-12930K9	Brushed Nickel Architectural Bronze	22-1/2" W., 4-3/4" ht. Extends 3-7/8". H/CTR 2-3/8".	37w integrated LED, 3000K, 90 CRI, 1222 delivered lumens.	



P2834-0930K9



P2834-12930K9




P2839-0930K9



P2839-12930K9

Parallel LED

The sophisticated, modern style of the Parallel Collection features crisp, tubular, opal glass diffusers, each paired with a simple modern metal backplate for an understated, elegant design.

Product No.	Finish	Size	Source	Input
P300183-009-30 P300183-129-30 P300183-012-30 P300183-015-30	Brushed Nickel Architectural Bronze Satin Brass Polished Chrome	Installs horizontal or vertical. 22-3/8" W., 4-3/4" ht. Extends 2-3/4". H/CTR 2-3/8".	36w integrated LED, 3000K, 90CRI, 2166 delivered lumens.	120V 
P300184-009-30 P300184-129-30 P300184-012-30 P300184-015-30	Brushed Nickel Architectural Bronze Satin Brass Polished Chrome	Installs horizontal or vertical. 32" W., 4-3/4" ht. Extends 2-3/4". H/CTR 2-3/8".	53w integrated LED, 3000K, 90CRI, 2872 delivered lumens.	
P710050-009-30 P710050-012-30 P710050-015-30 P710050-129-30	Brushed Nickel Architectural Bronze Satin Brass Polished Chrome	4-3/4" W., 11" ht. Extends 2-3/4". H/CTR 7-1/2".	16w integrated LED, 3000K, 90CRI, 930 delivered lumens.	



P300184-009-30



P300183-012-30



P300183-009-30



P300184-012-30



P300184-129-30



P300183-015-30



P300183-129-30



P300184-015-30



P710050-009-30



P710050-015-30




P710050-129-30



P710050-012-30

Blanco LED

The Blanco Collection highlights classic forms with crisp, contemporary updates. Offered in a variety of metal finishes, each fixture features a thin, horizontal cylinder shade for a clean, linear design. Blanco LED is ideal for modern and transitional settings.

Product No.	Finish	Size	Source	Input
P300150-009-30 P300150-012-30 P300150-031-30 P300150-150-30	Faux White Marble Brushed Nickel Satin Brass Matte Black	Installs horizontal or vertical. 22-1/4" W., 4-3/4" ht. Extends 3-5/8". H/CTR 2-3/8".	36w integrated LED, 3000K, 90CRI, 1942 delivered lumens.	120V 
P300151-009-30 P300151-012-30 P300151-031-30 P300151-150-30	Faux White Marble Brushed Nickel Satin Brass Matte Black	Installs horizontal or vertical. 32-3/8" W., 4-3/4" ht. Extends 3-3/4". H/CTR 2-3/8".	53w integrated LED, 3000K, 90CRI, 2768 delivered lumens.	
P710047-009-30 P710047-012-30 P710047-031-30 P710047-150-30	Faux White Marble Brushed Nickel Satin Brass Matte Black	Installs horizontal or vertical. 32-3/8" W., 4-3/4" ht. Extends 3-3/4". H/CTR 2-3/8".	53w integrated LED, 3000K, 90CRI, 2768 delivered lumens.	



P300151-150-30



P300150-031-30



P300150-150-30



P300151-031-30



P300151-009-30



P300150-012-30



P300150-009-30



P300151-012-30



P710047-150-30



P710047-009-30





P710047-012-30



P710047-031-30

Ace LED

Modern wall fixtures with geometric etched glass shades. ELV dimming

Product No.	Finish	Size	Source	Input
P2142-1530K9 P2142-2030K9	Polished Chrome Antique Bronze	7" W., 4-3/4" ht. Extends 4". H/CTR 2-3/4".	One 9w LED module, 3000K, 90CRI, 623 source lumens/module	120V  
P2143-1530K9 P2143-2030K9	Polished Chrome Antique Bronze	15-1/2" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	Two 9w LED modules, 3000K, 90CRI, 623 source lumens/module	
P2144-1530K9 P2144-2030K9	Polished Chrome Antique Bronze	24" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	Three 9w LED modules, 3000K, 90CRI, 623 source lumens/module	
P2145-1530K9 P2145-2030K9	Polished Chrome Antique Bronze	32-1/2" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	Four 9w LED modules, 3000K, 90CRI, 623 source lumens/module	



P2142-1530K9



P2142-2030K9



P2143-1530K9



P2143-2030K9



P2144-1530K9



P2144-2030K9






P2145-1530K9



P2145-2030K9

Phase 1.1 LED

Featuring a cylindrical acrylic diffuser and a simple rectangular backplate, Phase 1.1 offers a variety of lengths to accommodate residential, light commercial and multi-family applications. An integrated LED source provides uniform illumination, as well as energy and cost savings benefits.

Product No.	Finish	Size	Source	Input
P300223-009-30	Brushed Nickel	24" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	22w integrated LED, 3000K, 90CRI, 1675 delivered lumens.	120V   
P300224-009-30	Brushed Nickel	36" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	33w integrated LED, 3000K, 90CRI, 2600 delivered lumens.	
P300225-009-30	Brushed Nickel	48" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	42w integrated LED, 3000K, 90CRI, 3500 delivered lumens.	



P300224-009-30





P300223-009-30



P300225-009-30


Phase 1.2 LED

A classic form with contemporary updates, this elongated acrylic shade comes with decorative accents. Both a faux stone option and white geometric decorative diffuser are included to further customize the fixture. An integrated LED source provides uniform illumination, as well as energy and cost savings benefits.

Product No.	Finish	Size	Source	Input
P300205-009-30	Brushed Nickel	24" W., 4-3/4" ht. Extends 4-1/2". H/CTR 2-3/8".	22w integrated LED, 3000K, 90CRI, 1575 delivered lumens.	120V  
P300206-009-30	Brushed Nickel	36" W., 4-3/4" ht. Extends 4-1/2". H/CTR 2-3/8".	33w integrated LED, 3000K, 90CRI, 2475 delivered lumens.	
P300207-009-30	Brushed Nickel	48" W., 4-3/4" ht. Extends 4-1/2". H/CTR 2-3/8".	42w integrated LED, 3000K, 90CRI, 3400 delivered lumens.	



Detail of faux stone accent



Detail of geometric accent



P300205-009-30
shown with faux stone diffuser






P300206-009-30
shown with decorative geometric diffuser



P300207-009-30
shown with faux stone diffuser

Phase 2.1 LED

Phase 2.1 features an acrylic lens that provides even illumination. This specially designed linear fixture delivers ambient light to surfaces free of shadows. Phase 2.1 is a perfect addition to modern applications. An integrated LED source provides energy and cost savings benefits.

Product No.	Finish	Size	Source	Input
P300208-009-30	Brushed Nickel	24" W., 4-3/4" ht. Extends 3-1/2". H/CTR 2-3/8".	23w integrated LED, 3000K, 90CRI, 1600 delivered lumens.	120V   
P300209-009-30	Brushed Nickel	36" W., 4-3/4" ht. Extends 3-1/2". H/CTR 2-3/8".	34w integrated LED, 3000K, 90CRI, 2450 delivered lumens.	
P300225-009-30	Brushed Nickel	48" W., 4-3/4" ht. Extends 3-1/2". H/CTR 2-3/8".	44w integrated LED, 3000K, 90CRI, 3300 delivered lumens.	



P300210-009-30



P300209-009-30



P300208-009-30






P300208-009-30
mounted vertical

All fixtures can be installed horizontally or vertically.

Phase 2.2 LED

Phase 2.2 features an acrylic shade framed by architectural accents in Brushed Nickel complete the design to deliver ambient light to surfaces free of shadows. Ideal for residential, commercial and multi-family applications. An integrated LED source provides energy and cost savings benefits.

Product No.	Finish	Size	Source	Input
P300211-009-30	Brushed Nickel	24" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	23w integrated LED, 3000K, 90CRI, 1550 delivered lumens.	120V   
P300212-009-30	Brushed Nickel	36" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	34w integrated LED, 3000K, 90CRI, 2400 delivered lumens.	
P300213-009-30	Brushed Nickel	48" W., 4-3/4" ht. Extends 4". H/CTR 2-3/8".	44w integrated LED, 3000K, 90CRI, 3250 delivered lumens.	



P300212-009-30





P300211-009-30



P300213-009-30


Bath LED

The Bath LED Collection offers a taste of subtle sophistication to any design. Beautiful Brushed Nickel bands cap each end of the shades for a clean, modern aesthetic.

Product No.	Finish	Size	Source	Input
P300243-009-30	Brushed Nickel	24" W., 6" ht. Extends 4-1/4".	23W integrated LED, 3000K, 90CRI, 1798 delivered lumens.	120V  
P300244-009-30	Brushed Nickel	48" W., 6" ht. Extends 4-1/4".	37W integrated LED, 3000K, 90CRI, 3040 delivered lumens.	



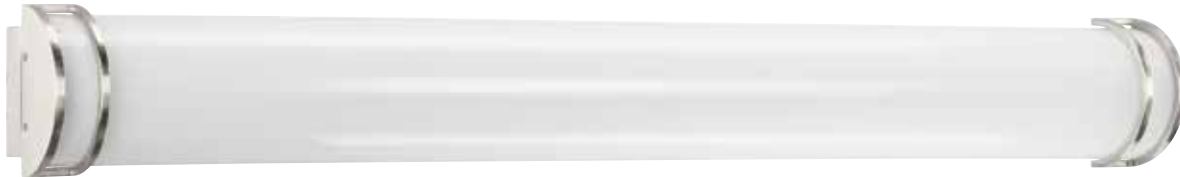

P300243-009-30



P300244-009-30

Cloud LED

The Cloud LED Collection features crisp opal white shades. Each shade is shaped into a linear tube design with a seamless aesthetic. The shades are offered in two different sizes to offer you versatility when it comes to fulfilling your design vision. This product includes a unique feature that allows the user to select color temperature. Fixture is integrated with an internal switch, allowing the user to select CCT options from 3000K, 4000K, or 5000K.

Product No.	Finish	Size	Source	Input
P300239-060-CS	Opal White	26-3/8" L., 6-1/8" W., ht. 4-5/8".	23w integrated LED, CCT selectable (3000K, 4000K, 5000K), 90CRI, 2124 delivered lumens.	120V  
P300240-060-CS	Opal White	38-1/4" L., 6-1/8" W., ht. 4-5/8".	32w integrated LED, CCT selectable (3000K, 4000K, 5000K), 90CRI, 2760 delivered lumens.	




P300239-060-CS



P300239-060-CS

Captarent


80+ CRI

Product No.	Finish	Size	Source	Input
PCIM1-2543-830-U	Mirrored	24-3/4" W., 43" ht., Extends 2-3/8". ADA	25W Integrated LED, 1140 nominal lumens	120 - 277V 
PCIM1-2543-835-U				
PCIM1-2543-840-U				
PCIM1-3143-830-U		31-3/4" W., 43" ht., Extends 2-3/8". ADA	36W Integrated LED, 1650 nominal lumens	
PCIM1-3143-835-U				
PCIM1-3143-840-U				
PCIM1-3743-830-U		37-3/4" W., 43" ht., Extends 2-3/8". ADA	36W Integrated LED, 1690 nominal lumens	
PCIM1-3743-835-U				
PCIM1-3743-840-U				
PCIM1-3743-840-U				

LED FEATURES

- Architecturally designed to provide soft, pleasing illumination
- Perimeter etched panels are indirectly backlit to provide uniform illumination
- Available in three sizes: 25"x43", 31"x43" and 37"x43"
- 80+ or 90+ CRI; Available in 3000K, 3500K, and 4000K color temperature options
- Universal (120-277) voltage, 0-10V dimming capable
- Mirror edges have brushed, radius treatment for consistency in appearance
- Easy installation of metal housing; simple, hanging attachment of mirror to housing.

90+ CRI

Product No.	Finish	Size	Source	Input
PCIM1-2543-930-U	Mirrored	24-3/4" W., 43" ht., Extends 2-3/8". ADA	25W Integrated LED, 1140 nominal lumens	120 - 277V 
PCIM1-3143-930-U		31-3/4" W., 43" ht., Extends 2-3/8". ADA	36W Integrated LED, 1650 nominal lumens	
PCIM1-3743-930-U		37-3/4" W., 43" ht., Extends 2-3/8". ADA	36W Integrated LED, 1690 nominal lumens	



PCIM1-3143-840-U
Featuring Ace



Captarent LED Illuminated Mirror

The Captarent LED illuminated mirror provides a clean, architecturally pleasing solution for illuminating the vanity that is ideal for multi-family, hospitality, assisted living and residential applications. The indirect, backlit solution delivers soft illumination that is well-suited for facial rendering.



Perimeter etched panels are indirectly backlit to provide soft illumination for rendering facial features.



Mirror edges have a brushed, radius treatment for consistency in appearance.



Available in four sizes and in three different light color temperatures.



All models are ADA compliant and simple to install.



The housing comes with a standard antimicrobial paint finish to inhibit the growth of microbes.



Standard 0-10V dimming.



Markor Pendant System & Ordering

Simple to order. Specify two separate pieces – shade and stem kit of your choice.

Step 1: Choose a fabric



Black Parchment Paper



Beige Silken Fabric



Summer Linen



Khaki



Harvest Linen

Step 2: Select a shade size

10" DRUM SHADES

P8828-30 Summer Linen



16" DRUM SHADE

P8822-01 Black Parchment Paper

P8823-01 Beige Silken Fabric

P8829-30 Summer Linen



22" DRUM SHADES

P8824-01 Black Parchment Paper

P8825-01 Beige Silken Fabric

P8830-30 Summer Linen

P8830-56 Khaki

P8830-59 Harvest Linen



Step 3: Select a stem kit

Shades and pendant kits are sold separately.

10" shade can be used only with pendant kit P5198.

16" and 22" shades can be used with pendant kit P5198 or P5199.

ONE-LIGHT STEM KIT

P5198-09 Brushed Nickel

P5198-20 Antique Bronze

P5198-12 Satin Brass

P5198-31 Black

1-5/8" dia., 5-5/8" ht. Overall ht. w/stem and lamps 66"; wire 10'.

One medium base lamp, 100w max.



THREE-LIGHT STEM KIT

P5199-09 Brushed Nickel

P5199-20 Antique Bronze

P5199-12 Satin Brass

P5199-31 Black

Three-light pendant kit for use with 16" and 22" Markor shades. 4-3/4" dia., 6-1/4" ht. Overall ht. w/stem and lamps 64"; wire 10'

Three medium base lamps, each 100w max.



Round Canopy

The round accessory accommodates 3 fixtures and is available in Brushed Nickel, Antique Bronze and Graphite finishes.

Product No.	Finish	Size
P8403-09	Brushed Nickel	15-1/2" dia., 1-3/8" ht.
P8403-20	Antique Bronze	
P8403-143	Graphite	



P8403-09



P8403-20



P8403-143

Round canopy can be used for three pendants. Refer to website for details.



Linear Canopy

Progress Lighting's canopy accessory offers a convenient way to mount groupings of pendants. The linear option can hold either 2 or 3 pendants. Available in Brushed Nickel, Antique Bronze and Graphite finishes.

Product No.	Finish	Size
P8404-09 P8404-20 P8404-143	Brushed Nickel Antique Bronze Graphite	See website for additional details. 4-1/4" W., 23-1/4" L., 1 1/16" ht.
P860004-009 P860004-020 P860004-143	Brushed Nickel Antique Bronze Graphite	See website for additional details. 4-1/4" W., 59-5/8" L., 1" ht.
P860005-009 P860005-143 P860005-020	Brushed Nickel Antique Bronze Graphite	See website for additional details. 8-1/8" W., 39-5/8" L., 1" ht.



P860005-143
shown in use with
Staunton pendants
Design Series™



P860004-009



P8404-09



P860004-143



P860005-009



P860004-020



P8404-143



P860005-143



P8404-20




P860005-020



Planck LED

Provide a dramatic architectural lighting design to any space with the Planck LED Collection. A smooth, metal beam suspends from the ceiling to add clean, simple visual interest to minimalist residential or commercial settings.

Product No.	Finish	Size	Source	Input
P500276-009-30 P500276-028-30 P500276-031-30	Brushed Nickel Matte White Matte Black	47-1/2" W., 1-3/4" D., 1-3/8" ht. Overall ht. w/cord 113"; wire 9'.	39w integrated LED, 3000K, 90CRI, 2900 delivered lumens.	120V 

P500276-009-30



P500276-031-30




P500276-028-30



Concourse LED

The Concourse LED linear pendant features minimalist design styling and a slim profile that appears to float along the ceiling. Offering energy efficiency and low maintenance benefits, Concourse LED is suitable for both home and commercial applications providing direct, ambient, beautifully diffused light. A Brushed Nickel frame completes the clean seamless look.


Product No.	Finish	Size	Source	Input
P500002-009-30	Brushed Nickel	40" W., 5-1/4" D., 3" ht. Overall ht. w/cord 113"; wire 9'.	39w integrated LED, 3000K, 90CRI, 2400 delivered lumens.	120V 

P500002-009-30



Brookside LED

Inspired by vintage light fixtures found in early 20th century train stations. Metal shade and double prismatic glass options.


Product No.	Finish	Size	Source	Input
P5024-0930K9	Brushed Nickel	12" dia., 9-1/8" ht. Overall ht. w/stem 65"; wire 10'.	One 17w LED, 3000K, 90CRI, 1211 source lumens.	120V 

P5024-0930K9



Fresnel Lens LED


Industrial roots in form and function. Antique-inspired Fresnel glass lens in Brushed Nickel, Oil Rubbed Bronze, or Chrome. ELV dimming.

Product No.	Finish	Size	Source	Input
P5050-0930K9 P5050-1530K9 P5050-10830K9	Brushed Nickel Polished Chrome Oil Rubbed Bronze	6-1/8" dia., 6-1/4" ht. Overall ht. w/stem 72-1/4"; wire 10'.	One 9w LED module, 3000K, 90CRI, 623 source lumens	120V 
P5188-0930K9 P5188-1530K9 P5188-10830K9	Brushed Nickel Polished Chrome Oil Rubbed Bronze	12-1/8" dia., 10-1/2" ht. Overall ht. w/stem 77"; wire 10'.	One 17w LED module, 3000K, 90CRI, 1211 source lumens	



Dome LED



Inspired to enhance modern home décor, Dome LED pendants come in three intriguing color options and sizes for flexible lighting designs within the home. Satin Aluminum and Gloss White finishes feature a soft silver interior shade while the Antique Bronze dome is complemented with a painted gold interior. ELV dimming.

Product No.	Finish	Size	Source	Input
P5340-1630K9 P5340-2030K9 P5340-3030K9	Satin Aluminum Antique Bronze White	10" dia., 5-5/8" ht. Overall ht. w/cord 125-1/2"; cord 10'.	One 9w LED module, 3000K, 90CRI, 623 source lumens	120V 
P5341-1630K9 P5341-2030K9 P5341-3030K9	Satin Aluminum Antique Bronze White	16" dia., 8-7/8" ht. Overall ht. w/ cord 129"; cord 10'.	One 17w LED module, 3000K, 90CRI, 1211 source lumens	
P5342-1630K9 P5342-2030K9 P5342-3030K9	Satin Aluminum Antique Bronze White	22" dia., 11-3/4" ht. Overall ht. w/ cord 131-1/2"; cord 10'.	One 29w LED module, 3000K, 90CRI, 2197 source lumens	



Globe LED

Distinctive, classic globe pendants are accented by striking metal caps as they top beautiful etched glass shades in the Globe LED Collection. These versatility pendants can be displayed as a single fixture or in groups of two or more by mixing and matching finish options and lengths to create custom lighting designs for the home.


Product No.	Finish	Size	Source	Input
P500147-009-30 P500147-015-30 P500147-109-30 P500147-031-30	Brushed Nickel Polished Chrome Brushed Bronze Matte Black	8" dia., 9-3/4" ht. Overall ht. w/cord 122"; wire 10'.	One 9w LED module, 3000K, 90CRI, 624 source lumens.	120V  
P500148-009-30 P500148-015-30 P500148-109-30 P500148-031-30	Brushed Nickel Polished Chrome Brushed Bronze Matte Black	11-5/8" dia., 13-1/2" ht. Overall ht. w/cord 136-1/2"; wire 10'.	One 17w LED module, 3000K, 90CRI, 1276 source lumens.	



Prismatic Glass LED

A bold and striking prismatic glass shade is the focal point in these LED pendants. Featuring a sleek Brushed Nickel cap and stems highlighting the industrial styling. Bottom of fixture is enclosed with etched glass diffuser. ELV dimming.



P5143-0930K9

Product No.	Finish	Size	Source	Input
P5143-0930K9	Brushed Nickel	12-3/4" dia., 10-7/8" ht. Overall ht. w/stem 77"; wire 10'.	One 9w LED module, 3000K, 90CRI, 623 source lumens	120V 



Neat LED

These timeless and classic LED pendants feature designer oriented details and polished opal glass. Can be displayed singularly or in groupings of two or more in a variety of spaces, such as Modern Farmhouse, Coastal and Mid-Century Modern environments.

Product No.	Finish	Size	Source	Input
P500065-009-30	Brushed Nickel	4-3/8" dia., 13-1/2" ht. Overall ht. w/cord 124-1/2"; wire 10'.	One 9w LED module, 3000K, 90CRI, 624 source lumens.	120V  
P500066-009-30	Brushed Nickel	6-5/8" dia., 13-1/2" ht. Overall ht. w/cord 124-1/2"; wire 10'.	One 9w LED module, 3000K, 90CRI, 624 source lumens.	


P500065-009-30

P500066-009-30



Avant LED



A modern LED pendant featuring contrasting textures, including sandblasted glass inside accented by a polished outside surface. ELV dimming.

Product No.	Finish	Size	Source	Input
P5072-0930K9 P5072-2030K9	Brushed Nickel Antique Bronze	9" dia., 4-3/4" ht. Overall ht. w/ cord 125"; wire 10'	One 9w LED module, 3000K, 90CRI, 623 source lumens	120V 



Simple LED

This Simple LED pendant has the LED module tucked inside a frosted acrylic shade. A light commercial pendant ideal for restaurant, bar and hotel applications. ELV dimming.


Product No.	Finish	Size	Source	Input
P5176-0930K9 P5176-2030K9	Brushed Nickel Antique Bronze	5-7/8" dia., 8-5/8" ht. Overall ht. w/cord 130"; wire 10'	One 9w LED module, 3000K, 90CRI, 624 source lumens	120V  



Pure LED

Cord hung LED pendants with design oriented details. Antique Bronze and White have an anodized gold interior. Pistachio and Brushed Nickel have a gloss white interior. ELV dimming.


P5175-0930K9

Product No.	Finish	Size	Source	Input
P5175-0930K9	Brushed Nickel	6-1/2" dia., 8-7/8" ht. Overall ht. w/ cord 130"; wire 10'.	One 9w LED module, 3000K, 90CRI, 623 source lumens	120V 



Warehouse Pendant LED

Smooth cord hung metal shade with white inner-lining. ELV dimming.

Product No.	Finish	Size	Source	Input
P5094-0930K9	Brushed Nickel	16" dia., 7-1/2" ht. Overall ht. w/ cord 129"; wire 10'	One 17w LED module, 3000K, 90CRI, 1211 lumens	120V 
P5094-7430K9	Venetian Bronze			

P5094-0930K9



P5094-7430K9







*Image credit to Toll Brothers
and Possibilities for Design*



Ceiling Fans

POWERFUL, ECONOMIC AIRFLOW
FOR ALL SETTINGS

Today's ceiling fans pair function and technology with the latest design trends to outfit indoor and outdoor public spaces in style and comfort.

Vast

Beautiful and expansive in design, the 72" Vast ceiling fan is ideal for use in large areas and outdoor covered areas for maximum cooling. A white opal shade complements a variety of finish options, including Brushed Nickel with Chrome accents, Antique Bronze, Matte Black, or White with Chrome Accents.

Product No.	Finish	Size	Blades	Source
P2550-0930K	Brushed Nickel	72" dia., 16-3/4" ht. 80" lead wires	Brushed Nickel	18w LED module, 3000K, 90 CRI, 1400 lumens dimmable,
P2550-2030K	Antique Bronze		Antique Bronze	
P2550-3030K	White		White	
P2550-3130K	Matte Black		Black	



P2550-0930K shown with
Brushed Nickel blades and
Chrome Accents

ENERGY INFORMATION AT HIGH SPEED		FEATURES
AIRFLOW	8,100 cubic feet per minute	<ul style="list-style-type: none"> Limited lifetime warranty Dual Mount (flat or sloped ceiling-20°) DC Motor Aluminum blades Damp Location Rated White opal glass Remote control with batteries is included
ELECTRICITY USE	37 watts (excludes lights)	
AIRFLOW EFFICIENCY	247 CFM/W	



Full Function Remote Control Included
Full-range dimming for light
Six-speed fan operation
Reverse direction control



*P2550-3130K shown with
Black blades*







*P2550-2030K shown with
Antique Bronze blades*



*P2550-3030K shown
with White blades and
Chrome Accents*

Sanford

Sanford delivers ultra powerful air movement and energy efficient illumination packaged in a modern design. Ideal for both interior and outdoor settings, this "fandelier" adds a contemporary style to porches, foyers, bath and vanity areas providing a wide range of applications. Sanford includes an integrated 23W LED module, offering both form and function with energy and cost-savings benefits. A three-speed remote control is included.

Product No.	Finish	Size	Source
P2594-0930K P2594-12930K	Brushed Nickel Architectural Bronze	22-7/8" dia., 17-3/4" ht. 80" lead wires.	23w LED Module, 3000K, 90 CRI, dimmable.    



P2594-0930K



P2594-12930K

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	1,008 cubic feet per minute
ELECTRICITY USE	37 watts (excludes lights)
DOE WEIGHTED CFM/W	27 CFM/W

FEATURES

- Limited Lifetime Warranty
- Dual Mount (flat or sloped ceiling-18.5°)
- AC Motor
- Metal blades
- Remote control with batteries is included
- Remote control may be replaced with P2630-30 or P2630-95 wall control



Three-Speed Remote Control Included
Three-speed fan operation
Full-range dimming for light

Gaze

Three-blade 60" Gaze ceiling fan features an LED light source, offering both form and function with energy- and cost-savings benefits. An opal white shade contains an 18W dimmable, 3000K LED module. Full range dimming and remote control with battery is included.

Product No.	Finish	Size	Blades	Source
P2554-0930K P2554-1530K P2554-2030K P2554-3130K	Brushed Nickel Polished Chrome Antique Bronze Black	60" dia., 13-1/8" ht. 80" lead wires	Silver White Washed Walnut Matte Black	 Cherry Cherry Cherry Distressed Ebony  Fan Light



Three-Speed Remote Control Included
Three-speed fan operation
Full-range dimming for light

ENERGY INFORMATION AT HIGH SPEED






AIRFLOW	5,902 cubic feet per minute
ELECTRICITY USE	75 watts (excludes lights)
AIRFLOW EFFICIENCY	87 CFM/W

FEATURES

- Limited lifetime warranty
- Dual Mount (flat or sloped ceiling-20°)
- Downrod installation only. Can not be flush mounted.
- AC Motor
- Manual reverse switch
- Reversible plywood blades
- White shatterproof lens
- Remote control with battery is included
- Remote control may be replaced with P2630-30 or P2630-95 wall control

Oriole

This 60" Oriole ceiling fan is the perfect addition to interior garages, industrial shops or commercial buildings to distribute the right amount of air and keep the space cool and comfortable. Oriole contains an integrated 18W LED module, with an optional finishing cap offering the user the choice to install with or without the light kit. A remote control is included to adjust speed and turn on/off the light or fan. A blank off plate comes standard.

Product No.	Finish	Size	Blades	Source
P2592-0930K	Brushed Nickel	60" dia., 15" ht. 80" lead wires.	Silver	18w LED Module, 3000K, 90 CRI, 1400 lumens, dimmable.     
P2592-3130K	Black		Black	
P2592-12930K	Architectural Bronze		Architectural Bronze	



P2592-3130K shown with Black blades and light kit removed using blank plate



P2592-0930K shown with Silver blades



P2592-12930K shown with Architectural Bronze blades

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	6,171 cubic feet per minute
ELECTRICITY USE	51 watts (excludes lights)
DOE WEIGHTED CFM/W	132 CFM/W

FEATURES


- Limited lifetime warranty
- Dual Mount (flat or sloped ceiling-18.5°)
- AC Motor
- ABS blades
- White opal glass shade
- Remote control with battery is included
- Remote control may be replaced with P2630-30 or P2630-95 wall control



Three-Speed Remote Control Included
Three-speed fan operation
Full-range dimming for light

Soar

With a white opal shade and a 17W dimmable LED module, the 54" Soar ceiling fan offers energy and cost-savings benefits for a variety of living spaces. The four-blade fan comes with a remote control and is available in Brushed Nickel, Antique Bronze and White finishes. LED source features a 3000K-color temperature. Soar features a dual mount system and includes a remote control with battery.

Product No.	Finish	Size	Blades	Source
P2542-0930K P2542-2030K P2542-3030K	Brushed Nickel Antique Bronze White	54" dia., 15" ht. 80" lead wires.	Black Walnut White	17w LED Module, 3000K, 90 CRI, 1400 lumens, dimmable. 



P2542-0930K shown with Black blades



P2542-2030K shown with Walnut blades



P2542-3030K shown with White blades

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	4,814 cubic feet per minute
ELECTRICITY USE	65 watts (excludes lights)
DOE WEIGHTED CFM/W	83 CFM/W

FEATURES


- Limited lifetime warranty
- Dual Mount (flat or sloped ceiling-20°)
- AC Motor
- Non-reversible plywood blades
- White opal shatterproof lens
- Remote control with battery is included
- Remote control may be replaced with P2630-30 or P2630-95 wall control



Remote Control Included
Three-speed fan operation
Full-range dimming for light

Gust

This five-blade 54" Gust ceiling fan features a white opal glass shade that is available in a Brushed Nickel, Graphite or Antique Bronze finish. A remote control is included. Gust has a dual mount system to offer greater flexibility when installing. The 18W dimmable, 3000K LED module provides energy and cost-savings benefits to the homeowner.

Product No.	Finish	Size	Blades	Source
P2582-0930K P2582-2030K P2582-14330K	Brushed Nickel Antique Bronze Graphite	54" dia., 16" ht. 80" lead wires.	Silver Walnut Graphite	18w LED Module, 3000K, 90 CRI, 1400 lumens, dimmable. 



P2582-2030K shown with Walnut blades



P2582-0930K shown with Silver blades



P2582-14330K shown with Graphite blades

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	5,242 cubic feet per minute
ELECTRICITY USE	65 watts (excludes lights)
DOE WEIGHTED CFM/W	87 CFM/W

FEATURES








- Limited Lifetime Warranty
- Dual Mount (flat or sloped ceiling-18.5°)
- AC Motor
- Non-reversible plywood blades
- White opal glass shade
- Remote control with battery is included
- Remote control may be replaced with P2630-30 or P2630-95 wall control



Three-Speed Remote Control Included
Three-speed fan operation
Full-range dimming for light

Kudos

This five-blade 52" Kudos ceiling fan features a clear Fresnel glass shade. Available in a Brushed Nickel, Polished Chrome or Antique Bronze finish and includes a remote control. The Kudos features a dual mount system to offer greater flexibility when installing. The 17W dimmable, 3000K LED module provides energy and cost-savings benefits to the homeowner.

Product No.	Finish	Size	Blades	Source
P2568-0930K P2568-1530K P2568-2030K	Brushed Nickel Polished Chrome Antique Bronze	52" dia., 15-3/4" ht. 80" lead wires	Silver Medium Cherry Walnut <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="text-align: center;">  American Walnut </div> <div style="text-align: center;">  Black </div> <div style="text-align: center;">  Cherry </div> </div>	17w LED module, 3000K, 90 CRI, 1400 lumens, dimmable. <div style="display: flex; justify-content: space-around; margin-top: 5px;">     </div>



P2568-0930K shown with American Walnut blades



P2568-1530K shown with Black blades



P2568-2030K shown with Cherry blades

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	5,160 cubic feet per minute
ELECTRICITY USE	60 watts (excludes lights)
DOE WEIGHTED CFM/W	91 CFM/W

FEATURES

- Limited Lifetime Warranty
- Dual Mount (flat or sloped ceiling-18.5°)
- AC Motor
- Reversible plywood Blades
- Clear Fresnel glass shade
- Remote control with battery is included
- Remote control may be replaced with P2630-30 or P2630-95 wall control




Three-Speed Remote Control Included
Three-speed fan operation
Full-range dimming for light

52" Signature Fan

A 52" Signature 5-blade fan features reversible blades and a 30-year limited warranty. A powerful AirPro motor features a 3-speed, triple-capacitor control that can also be reversed to provide year-round comfort. Standard canopy is designed for sloped ceilings with 12:12 pitch and accepts universal light kits.

Product No.	Finish	Size	Blades
P2521-09	Brushed Nickel	52" dia., 14-5/8" ht. CTC 11-9/16" ht. 80" lead wires	White
P2521-09CH	Brushed Nickel		Cherry
P2521-09WA	Brushed Nickel		Classic Walnut
P2521-20	Antique Bronze		Classic Walnut
P2521-77	Forged Bronze		Dark Walnut
P2521-80	Forged Black		Cherry

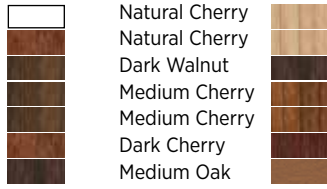

P2521-09 shown with White Blades



P2521-09 shown with Natural Cherry blades



P2521-09CH shown with Cherry Blades


ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	4,701 cubic feet per minute
ELECTRICITY USE	65 watts (excludes lights)
DOE WEIGHTED CFM/W	84 CFM/W

FEATURES

- 30-year limited warranty
- 45° Canopy
- Close-to-ceiling installation
- SureConnect® System
- AC Motor
- Compatible with universal light kits
- Three speed pull-chain switch
- Add a P2630-30 or P2630-95 wall control or P2662-01 hand-held remote control

CTC INSTALLATION





P2521-20 shown with
Classic Walnut blades



P2521-09WA shown with
Walnut blades




P2521-80 shown with
Dark Cherry blades



P2521-77 shown with
Classic Walnut blades

Trevina II 52"

A new addition to a popular ceiling fan collection, the 52" Trevina II features three blades available in Brushed Nickel, Matte White, and Antique Bronze finishes. Coolly modern, the Trevina II ceiling fan offers both form and function with an energy efficient 17w LED source with a 3000K-color temperature. Features a wall control switch.

Product No.	Finish	Size	Blades	Source
P2556-0930K P2556-2030K P2556-3030K	Brushed Nickel Antique Bronze Matte White	52" dia., 15-3/4" ht. 80" lead wires	Silver Medium Cherry Natural Cherry	17w LED module, 3000K, 90 CRI, 1400 lumens, dimmable. 



P2556-3030K shown with White blades



P2556-0930K shown with Silver blades



P2556-2030K shown with Medium Cherry blades

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	4,916 cubic feet per minute
ELECTRICITY USE	62 watts (excludes lights)
AIRFLOW EFFICIENCY	89 CFM/W

FEATURES

- Limited lifetime warranty (LED model)
- Dual Mount (flat or sloped ceiling-30°)
- AC Motor
- White opal glass
- Reversible plywood blades



Wall Control Included
Full-range dimming for light
Four-speed fan operation
Includes switch plate cover

Signature Plus II

Five-blade 54" Signature Plus II ceiling fan features an integrated LED light source, offering both form and function with energy and cost-savings benefits. The light kit contains a white opal shatterproof shade and is comprised of a 17W dimmable 3000K LED module.

Product No.	Finish	Size	Blades	Source
P2539-0930K P2539-2030K P2539-3030K	Brushed Nickel Antique Bronze White	54" dia., 15-1/2" ht. 80" lead wires.	Silver Medium Cherry Walnut	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <div style="width: 20px; height: 10px; background-color: #8B4513; border: 1px solid black; margin-bottom: 2px;"></div> <div style="width: 20px; height: 10px; background-color: #000000; border: 1px solid black; margin-bottom: 2px;"></div> <div style="width: 20px; height: 10px; background-color: #8B4513; border: 1px solid black;"></div> </div> <div style="margin-right: 10px;"> <p>American Walnut Black Cherry</p> </div> <div style="margin-right: 10px;"> <div style="width: 20px; height: 10px; background-color: #8B4513; border: 1px solid black; margin-bottom: 2px;"></div> <div style="width: 20px; height: 10px; background-color: #000000; border: 1px solid black; margin-bottom: 2px;"></div> <div style="width: 20px; height: 10px; background-color: #8B4513; border: 1px solid black;"></div> </div> </div> <p>17w LED Module, 3000K, 90 CRI, 1400 lumens, dimmable.</p> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid blue; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center; font-size: 8px;">T20</div> <div style="border: 1px solid blue; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center; font-size: 8px;">JA8</div> <div style="border: 1px solid blue; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center; font-size: 8px;"> </div> <div style="border: 1px solid blue; border-radius: 50%; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center; font-size: 8px;"> </div> </div>



P2539-0930K shown with
Silver blades



P2539-2030K shown with
Medium Cherry blades



P2539-3030K shown with
White blades

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	5,331 cubic feet per minute
ELECTRICITY USE	65 watts (excludes lights)
DOE WEIGHTED CFM/W	92 CFM/W

FEATURES

- Limited lifetime warranty
- 45° Canopy
- Downrod mount only
- AC Motor
- Reversible MDF blades
- Opal shatterproof shade
- Remote control with battery is included
- Remote control may be replaced with P2630-30 or P2630-95 wall control





Remote Control Included
Three-speed fan operation
Full-range dimming for light

52" Builder Fan

This 52" AirPro fan features 5 reversible blades and a 30-year limited warranty. A powerful AirPro motor contains a 3-speed pull chain switch, and a triple-capacitor that can also be reversed to provide year-round comfort. . Additionally, the fan can be installed without a downrod to accommodate lower ceilings. A quick install canopy securely holds the fan for wiring during installation. The Builder fan will also accept a universal light kit.

Product No.	Finish	Size	Blades
P2501-09	Brushed Nickel	52" dia., 13-1/2" ht. 80" lead wires	Cherry
P2501-15	Polished Chrome		Black
P2501-20	Antique Bronze		Medium Cherry
P2501-30	White		White
P2501-30W	White		White
P2501-143	Graphite		Graphite

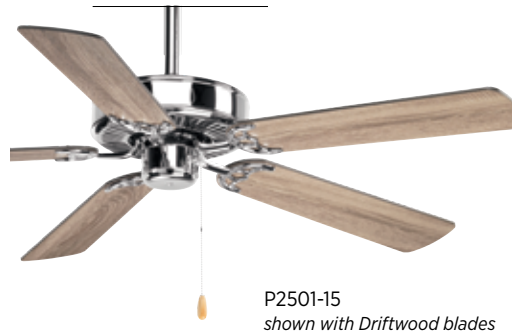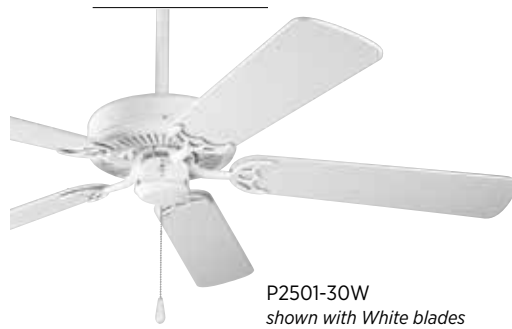

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	4,991 cubic feet per minute
ELECTRICITY USE	63 watts (excludes lights)
AIRFLOW EFFICIENCY	98 CFM/W

FEATURES

- 30-year limited warranty
- Close-to-ceiling installation with accessory
- SureConnect® System
- AC Motor
- Compatible with universal light kits
- Add a P2630 wall control or P2662-01 hand-held remote control

42" Builder Fan

42" AirPro ceiling fan with five reversible blades, an integral pull chain and a 15-year limited warranty. A powerful AirPro motor features a 3-speed, triple-capacitor control that can also be reversed to provide year-round comfort. The Builder fan will also accept a universal light kit.

Product No.	Finish	Size	Blades
P2500-09	Brushed Nickel	42" dia., 12-1/4" ht. CTC 8-5/16" ht. 72" lead wires	Cherry
P2500-20	Antique Bronze		Classic Walnut
P2500-30	White		White

Natural Cherry

Medium Cherry

Washed Oak

T20



Quick-Install Bracket



- Securely holds fan for wiring during installation. Installs without removing screws from electrical box.
- Dual-mount for downrod or close-to-ceiling installation.
- Works with sloped ceilings up to 23° (4:12 ceiling pitch)


ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	3,053 cubic feet per minute
ELECTRICITY USE	46 watts (excludes lights)
AIRFLOW EFFICIENCY	64 CFM/W

FEATURES

- 15-year limited warranty
- 23° Canopy
- Close-to-ceiling installation
- SureConnect® System
- AC Motor
- Compatible with universal light kits
- Three speed pull-chain switch
- Add a P2630 wall control or P2662-01 hand-held remote control



CTC INSTALLATION



52" Patio Fan

52" indoor/outdoor patio fan from AirPro. Includes 5 blades made with ABS all-weather material and a 15-year limited warranty. A powerful AirPro motor features a 3-speed, triple-capacitor control that can also be reversed to provide year-round comfort. A quick install canopy securely holds the fan for wiring during installation. The Patio fan will also accept a universal outdoor rated light kit.

Product No.	Finish	Size	Blades
P2502-20	Antique Bronze	52" dia., 12-3/4" ht.	Oak
P2502-30	White	CTC 9-11/16" ht.	White
P2502-80	Forged Black	72" lead wires	Toasted Oak
P2502-141	Galvanized		Silver

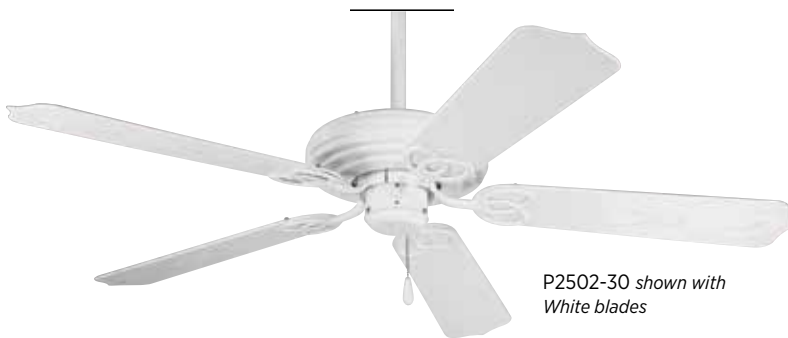

P2502-30 shown with White blades



P2502-80 shown with Toasted Oak blades



P2502-20 shown with Oak blades



P2502-141 shown with Silver blades


ENERGY INFORMATION AT HIGH SPEED

AIRFLOW	4,991 cubic feet per minute
ELECTRICITY USE	64 watts (excludes lights)
AIRFLOW EFFICIENCY	89 CFM/W

FEATURES

- 15-year limited warranty
- Dual Mount (flat or sloped ceiling-23°)
- Close-to-ceiling installation
- SureConnect® System
- Quick-Install canopy
- AC Motor
- ABS all-weather blades
- Compatible with universal light kits
- Three speed pull-chain switch
- Wet location rated
- Add a P2630-30 or P2630-95 wall control or P2662-01 hand-held remote control

CTC INSTALLATION





STAYING COOL IS A BREEZE!

Progress Lighting offers more sizes and styles of ceiling fans for residential and light commercial use than ever before. With options that include integrated LED light kits, WiFi control and many other great features. Perfect for any indoor or outdoor setting!



FIND YOUR PERFECT FAN.
VIEW OUR CATALOG AT
WWW.PROGRESSLIGHTING.COM

Icon Index



Products referencing this logo meet the energy efficiency requirements for light fixtures set forth in ENERGY STAR® product specifications. Please refer to www.energystar.gov for specific product qualifications and list of certified products.



Please note indoor only (dry location) fans should only be used indoors. Even if an outdoor area or screened-in porch is covered, the motor and the blades can be affected when exposed to humidity. You can, however, “bring the outdoors inside” – as using outdoor ceiling fans are perfectly acceptable to use in interior spaces.



If you are selecting a ceiling fan for a space that is outdoors and under a roof, i.e. any covered porches; you should select either a damp rated or wet listed fan. Damp location fans may also be used indoors.



If the fan comes directly into contact with water, you'll need to ensure that the ceiling fan has a “wet” listing. Ceiling fans designed for damp or wet locations feature elements, such as moisture-resistant motors and all weather blades. Wet location fans may also be used indoors.



This marking indicates fixtures that have an integrated LED or replaceable LED module that has been tested and listed in the California Appliance Database. Check for certified lamps, fixtures or LED light engines by searching the MAEDBS database. Go to cacertappliances.energyc.ca.gov



Outdoor installation only.



Complies with “American with Disabilities Act”



Amber options available to minimize glare onto beaches for sea turtle friendly illumination.



Products referencing this logo have been DesignLights Consortium® (DLC) qualified and are listed in DLC's Qualified Products List (QPL). Products included in QPL are considered high efficiency and may be eligible for energy rebates with participating energy providers. Please refer to the DLC website for specific product qualifications at www.designlights.org.



Table 150.0A defines products that do not have to meet JA8 and can be used to comply with 2016 Title 24. The most common types include:

- Pin-based linear or compact fluorescent light sources using electronic ballasts
- GU-24 sockets containing light sources other than LEDs
- Inseparable SSL luminaires that are installed outdoors



Products comply with the California Appliance Efficiency Regulations. Certified products are listed on the appliance efficiency database found at www.appliances.energy.ca.gov.



Products with this icon are Dark Sky Friendly and provide full cut-off to minimize glare and avoid light pollution.



The products with this logo have passed the cUL requirements and are available for sale in Canada. These products include the additional safety features needed to comply with the regulations in Canada. Items with the icon are listed with NRCan.



Products with this icon are compatible with our P2667-31 wi-fi control. Easily control your fan with your smart phone, tablet, voice controls or a hand-held remote. Use the Smart by Bond technology to control: on/off function of the fan and light kit, full range dimming, 3 fan speeds, breeze mode and 3 timer settings.



Product is made to order.



Quick ship product.

Every effort has been made to ensure the accuracy of information in this catalog. Progress Lighting reserves the right to make product changes from time to time, without prior notification, which may change the information provided in this catalog. Errors brought to our attention will be corrected in subsequent issues.

UL, CSA, or ETL Listed or Classified unless otherwise noted. Bulbs not included with fixtures unless specified. Specifications subject to change without notice.

Metal finishes not specified as “solid” have quality plated or painted finishes.

Finish representations are high resolution digital reproductions, and, while every effort has been made to render colors accurately, they may vary slightly from the actual product, especially hand-painted finishes, due to the nature of hand craftsmanship.

©Progress Lighting 2021

All rights reserved.
International copyright secured.



PROGRESS
LIGHTING™ | **COMMERCIAL**

PROGRESS LIGHTING

701 Millennium Boulevard
Greenville, SC 29607

www.progresslighting.com

